


## 70 CFM LED Bath Vent/Light - AI BFV70LED



A height	B grill size	C housing length	D housing width
5-3/4"	12-1/4" dia.	7-3/4"	6-3/4"
146mm	311mm	197mm	171mm



### Description

Provides efficient ventilation for small bathrooms, laundry rooms and utility rooms up to 65 square feet. 12 watt energy-efficient LED light provides pleasing light. Easy installation with plug in motor, built-in junction box, and built-in mounting tabs. Precision balanced fan blades for quiet operation.

### Specifications and Features


- Galvanized Housing Resists Humid Conditions & Changing Attic Temperatures, Unlike Plain Steel Housing Used in Many Vents.
- Housing has Ceiling/Wall Thickness Indicator Markings & Built-in Mounting Tabs for Quick Installation.
- Attractive Molded Grille with Diffuser Designed for LED Applications and Spring Clips for Smooth Fit Against Ceiling or Wall.
- Dishwasher Safe Grille for Easy Homeowner Cleaning.
- Easy Remove & Install Motor Assembly with Keyhole Mounting Bracket.
- Permanently Lubricated Motor with Plug for Quick Activations.
- Built-in Junction Box for Easy Wiring.
- Molded Fan Blade - Precision Balanced for Quiet Operation.
- Molded Duct Adapter with Built-in Damper for 4" duct.
- Units & Service Parts are CSA Listed.
- LED Array and Driver: 1200 lumen output (100 lpw), CRI: >70, CCT: 4000K, 30,000 Hour Rating, LED Wattage: 12w, Electronic Driver, 100-240V, 50/60Hz
- Listings & Ratings: Units & Service Parts are CSA Listed
- 60dB, 4.0 Sones

## Recessed Bath Vent/Light - AI BFVR70L



**RECESSED  
LIGHTLOOK**

A height	B length	D width
5-3/4"	13-1/4"	7-3/4"
146mm	337mm	197mm

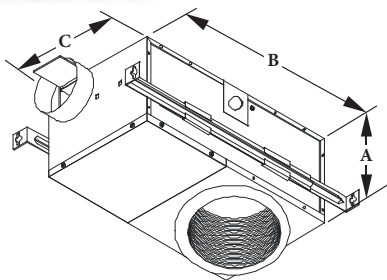

### Description

Contemporary recessed light look bath vent provides efficient ventilation for small bathrooms, laundry rooms and utility rooms up to 65 square feet. Easy installation with plug in motor, built-in junction box, and built-in mounting tabs. Precision balanced fan blades for quiet operation.

### Specifications and Features

- Galvanized Housing Resists Humid Conditions & Changing Attic Temperatures, Unlike Plain Steel Housing Used in Many Vents.
- Housing has Ceiling/Wall Thickness Indicator Markings & Built-in Mounting Tabs for Quick Installation.
- Easy Remove & Install Motor Assembly with Keyhole Mounting Bracket.
- Permanently Lubricated Motor with Plug for Quick Activations.
- Built-in Junction Box for Easy Wiring.
- Molded Fan Blade; Precision Balanced for Quiet Operation.
- Molded Duct Adapter with Built-in Damper for 4" duct.
- Attractive White Recessed Trim.
- Includes Medium Base Lampholder.
- Maximum 75w Lamp (Lamp Not Included).
- Units & Service Parts are CSA Listed.
- 50dB, 2.0 Sones