

Small LED Wall Pack - AI WP12QF1X23U5KZ


Lighting Products



L70
25°C → 182,000 Hours



A height	B length	D width
9-1/2"	7-5/8"	8-1/2"
241mm	194mm	216mm

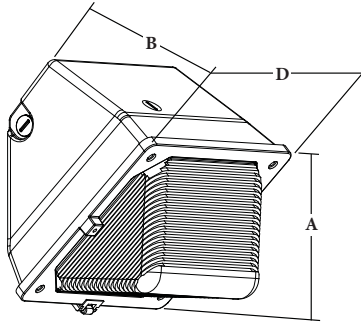

Description

The Atlantic Industrial AI WP12Q general purpose wall pack luminaire provides optically controlled wide spread light distribution designed to replace HID lighting systems up to 100w MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 8 to 15 feet can be used based on light level and uniformity requirements.

Specifications and Features

- Delivered Lumens:** 2,580
- Housing:** Die cast gasketed aluminum front frame and housing with 1/2" coin plugs, nickel-plated stainless steel hardware.
- Finish:** Textured architectural bronze powdercoat finish over a chromate conversion coating.
- Lens:** Prismatic borosilicate glass lens.
- Mounting Options:** Mount directly over a 4" recessed outlet box, or use 1/2" surface conduit or optional wall mount plate.
- LED Array:** Aluminum boards
- Wattage:** Array: 22.7w, System: 27.6w, (100w HID equivalent)
- Driver:** Electronic driver, 120-277V, 50/60Hz; dimmable driver
- Listing & Ratings:** CSA: Listed for wet locations. Operating temperatures: -40°C to +40°C. IP65


Medium LED Wall Pack - AI WP15QF1X41U5KZ



L70
25°C → 165,000 Hours



A height	B length	D width
9"	7-1/4"	14-1/4"
225mm	159mm	362mm

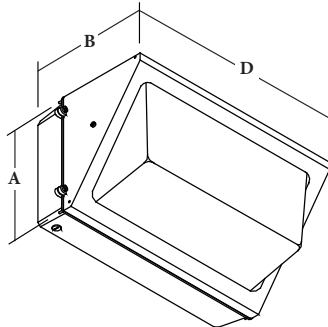

Description

The Atlantic Industrial AI WP15Q general purpose wall pack luminaire provides optically controlled wide spread light distribution designed to replace HID lighting systems from 70w to 175w MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 12 to 18 feet can be used based on light level and uniformity requirements.

Specifications and Features

- Delivered Lumens:** 5,400
- Housing:** Die cast aluminum housing & hinged front frame, 1/2" coin plugs with O-rings for conduit & photocell. Gasketed.
- Finish:** Textured architectural bronze powdercoat finish over a chromate conversion coating.
- Lens:** Molded prismatic borosilicate glass lens
- Mounting Options:** Cast-in template for mounting directly over a 4" recessed outlet box, or use 1/2" surface conduit.
- LED Array:** Aluminum boards
- Wattage:** Array: 41.3w, System: 47w, (250w HID equivalent)
- Driver:** Electronic driver, 120-277V, 50/60Hz; dimmable driver
- Listing & Ratings:** CSA: Listed for wet locations. Operating temperatures: -40°C to +40°C. IP65 sealed LED compartment.