

2Gen LED Bullet - AI FB1BC31X20U41KZ



L70
25°C

78,000 Hours

Description

The Atlantic Industrial AI FB1 LED Bullet Light Luminaire is available with a knuckle mounting feature and is designed to replace HID lighting systems up to 100w MH or HPS. Typical lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting can be accomplished using ground attachment accessories and up to heights of 12 feet based on light level and uniformity requirements.

Specifications and Features

- Delivered Lumens:** 1,800
- Housing:** Die cast aluminum housing with built-in heat sinks.
- Finish:** Textured architectural bronze powdercoat finish over a chromate conversion coating.
- Lens:** Tempered clear flat glass lens.
- Mounting Options:** Mount with included ½" NPS knuckle
- LED:** Cool copper COB
- Wattage:** COB: 20w
- Driver:** Electronic driver, 120-277V, 50/60Hz; dimmable driver
- Listing & Ratings:** CSA: Listed for wet locations. IP67



FIXTURE DIMENSIONS

5-3/4" diameter x
10" overall length
(including knuckle)

Medium LED Canopy - AI VN30QF1X23U5KSZ



L70
25°C


187,000 Hours

Description

The Atlantic Industrial AI VN30Q Medium Canopy luminaire is available for surface or pendant mounting configurations with an optical distribution designed specifically to replace HID lighting systems up to 100w MH or HPS. Typical lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 8 to 14 feet can be used based on light level and uniformity requirements.

Specifications and Features

- Delivered Lumens:** 2,730
- Housing:** Die cast aluminum housing, ½" coin plugs with O-rings for conduit & photocell on two sides & back, nickel-plated stainless steel hardware.
- Finish:** Textured architectural bronze powdercoat finish over a chromate conversion coating.
- Lens:** Standard clear polycarbonate prismatic lens
- Mounting Options:** Mount directly over a 4" recessed outlet box, or use ½" surface conduit.
- LED Array:** Aluminum boards
- Wattage:** Array: 21.7w, System: 25w. (100w HID equivalent)
- Driver:** Electronic Driver, 120-277V, 50/60Hz; dimmable driver
- Listing & Ratings:** CSA: Listed for wet locations. Operating temperatures: -40°C to +40°C. IP65 sealed LED compartment.

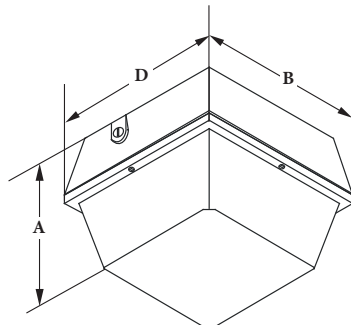

A height	B length	D width
7-1/4"	9"	9"
184mm	229mm	229mm