

## Large Semi Cutoff LED Wall Pack - AI WPA25QF1X58U5KZ

Lighting Products

**L70**  
25°C **144,000 Hours**




### Description

The Atlantic Industrial AI WPA25Q semi cutoff wall pack luminaire provides lower direct glare while increasing efficiency over full cutoff optics, and is designed to replace HID lighting systems from 250w to 400 MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 18 to 30 feet can be used based on light level and uniformity requirements.

### Specifications and Features

- **Delivered Lumens:** 5,000
- **Housing:** Die cast hinged and gasketed aluminum front frame and housing with 1/2" coin plugs, stainless steel hinge pins, safety cable to prevent glass impact during installation, nickel-plated stainless steel hardware.
- **Finish:** Textured architectural bronze powdercoat finish over a chromate conversion coating.
- **Lens:** Molded prismatic borosilicate glass lens
- **Mounting Options:** Cast-in template for mounting directly over a 4" recessed outlet box, or use 1/2" surface conduit.
- **LED Array:** Aluminum boards
- **Wattage:** Array: 57.8w, System: 68.6w; (400w HID equivalent)
- **Driver:** Electronic driver, 120-277V, 50/60Hz; dimmable driver
- **Listing & Ratings:** CSA: Listed for wet locations. Operating temperatures: -40°C to +40°C. IP65

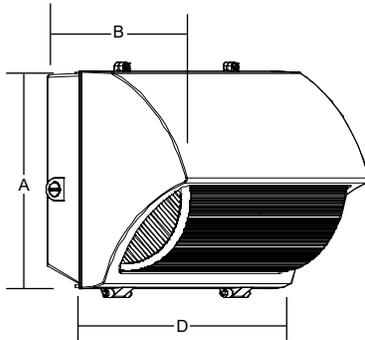

A height	B length	D width
13"	10½"	16½"
330mm	267mm	419mm

## Small Full Cutoff LED Wall Pack - AI WPC12QF1X22U\*KCZ

**L70**  
25°C **196,000 Hours**




### Description

The Atlantic Industrial AI WPC12Q cutoff wall pack luminaire is available with a choice of optical distributions designed to replace HID lighting systems up to 175w MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 8 to 15 feet can be used based on light level and uniformity requirements.

### Specifications and Features

- **Delivered Lumens:** 4K: 2,170; 5K: 2,260
- **Housing:** Die cast hinged and gasketed aluminum front frame and housing with 1/2" coin plugs. Nickel-plated stainless steel hardware. Photocell adaptable.
- **Finish:** Textured architectural bronze powdercoat finish over a chromate conversion coating.
- **Lens:** Tempered clear flat glass lens.
- **Mounting Options:** Cast-in template for mounting directly over a 4" recessed outlet box, or use 1/2" surface conduit.
- **LED Array:** Aluminum boards
- **Wattage:** Array: 21.7w, System: 25w; (175w HID equivalent)
- **Driver:** Electronic driver, 120-277V, 50/60Hz; dimmable driver
- **Listing & Ratings:** CSA: Listed for wet locations. Operating temperatures: -40°C to +40°C. IP65

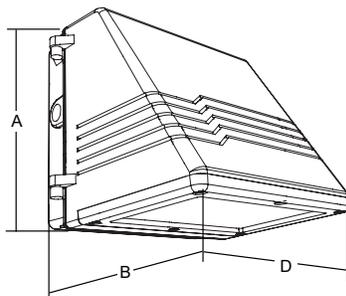

A height	B length	D width
8⅝"	9½"	8¾"
219mm	241mm	222mm

\*Specify CCT: 4=4000K; 5=5000K