

Small Moonglow - AI WPR30QF1X20U4KW

L70
25°C **50,000 Hours**

Description


The Atlantic Industrial AI WPR30Q Small Moonglow bulkhead luminaire is designed to replace fluorescent wall mount fixtures. The open front frame with opal polycarbonate lens allows an evenly diffused maximum light output. Typical applications include retail centers, multi-family housing, schools and universities, office buildings and medical facilities. Mounting heights of 8 to 12 feet can be used based on light level and uniformity requirements.

Specifications and Features

- **Delivered Lumens:** 1,870
- **Housing:** Round white ABS housing with hinged front frame and 4 clips with tamper resistant screws.
- **Lens:** Low profile opal polycarbonate lens for evenly diffused light
- **Mounting Options:** Wall mount
- **LED Array:** Aluminum boards
- **Wattage:** System: 20w
- **Driver:** Electronic driver, 120-277V, 50/60Hz; dimmable driver
- **Listing & Ratings:** CSA: Listed for wet locations. Operating temperatures: -40°C to +40°C. IP65



A length	B diameter
5¼"	13¾"
135mm	350mm

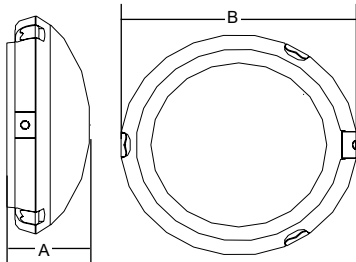

Large Moonglow - AI WPR32QF1X30U4KW

L70
25°C **50,000 Hours**

Description

The Atlantic Industrial AI WPR32Q Large Moonglow bulkhead luminaire is designed to replace fluorescent wall mount fixtures. The open front frame with opal polycarbonate lens allows an evenly diffused maximum light output. Typical applications include retail centers, multi-family housing, schools and universities, office buildings and medical facilities. Mounting heights of 8 to 20 feet can be used based on light level and uniformity requirements.

Specifications and Features

- **Delivered Lumens:** 2,640
- **Housing:** Round white ABS housing with hinged front frame and 4 clips with tamper resistant screws.
- **Lens:** Low profile opal polycarbonate lens for evenly diffused light
- **Mounting Options:** Wall mount
- **LED Array:** Aluminum boards
- **Wattage:** System: 30w
- **Driver:** Electronic driver, 120-277V, 50/60Hz; dimmable driver
- **Listing & Ratings:** CSA: Listed for wet locations. Operating temperatures: -40°C to +40°C. IP65



A length	B diameter
5¼"	17"
135mm	430mm

