


## Aluminum Service Entrance Caps - Clamp On

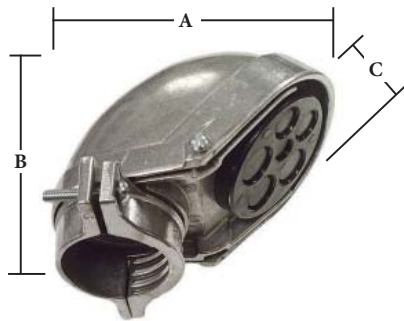

### Industry Standards

- UL 514B
- NEMA FB-1

### Construction

- Aluminum
- Steel screws

### Application


- Clamp type overhead Service Entrance cap for use with EMT, Rigid or IMC conduit
- Serves as a connecting point for the service wires to residence or commercial location

### Features

- Clamp on style can be used with unthreaded conduit
- Provides a water resistant cover to protect the service cables
- Aluminum construction resists corrosion and rusting

catalog number	size in inches	box qty.	inside hole size	number of holes	dimensions (in)		
					A	B	C
AI 800-CL	1/2"	10	19/64"	4	2.63	2.60	2.60
AI 801-CL	3/4"	10	3/8"	2	2.80	3.00	2.38
			13/32"	3			
AI 802-CL	1"	5	7/16"	5	3.12	3.45	2.65
			1/2"				
AI 803-CL	1 1/4"	5	27/64"	2	3.18	4.20	3.01
			5/8"	3			
AI 804-CL	1 1/2"	3	19/32"	2	4.55	4.90	3.33
			7/16"	1			
			3/4"	3			
AI 805-CL	2"	1	17/32"	1	5.85	6.64	4.64
			3/4"	2			
			1"	3			
AI 806-CL	2 1/2"	1	7/8"	3	7.50	9.43	6.00
			1"	1			
			1-5/16"	3			
AI 807-CL	3"	1	7/8"	3	7.50	10.05	8.00
			1"	1			
			1-5/16"	3			
AI 809-CL	4"	1	1-1/8"	4	8.85	11.63	8.00
			1-3/4"	3			

## Watertight Hubs



### Industry Standards

- UL 514B
- NEMA Standard FB-1
- Federal Spec. A-A-50553

### Construction

- Malleable Iron w/Zinc Plating
- Flame retardant Polyvinyl Chloride throat
- Steel Locknut

### Application

- To secure threaded rigid service entrance conduit to box or enclosure
- Rain, dust and oil tight and therefore suited for indoor and outdoor use

### Features

- Rain, Dust and Oil tight
- Flame retardant insulated throat
- Locknut provides additional protection from vibrations

catalog number	size in inches	box qty.	weight lbs. per unit	weight lbs. per box	dimensions (in.)		
					A	B	C
AI LWH 050	1/2"	20	0.182	3.64	0.813	0.625	1.500
AI LWH 075	3/4"	40	0.251	10.04	0.938	0.625	1.813
AI LWH 100	1"	20	0.389	7.78	1.063	0.750	2.063
AI LWH 125	1 1/4"	10	0.544	5.44	1.250	0.750	2.313
AI LWH 150	1 1/2"	10	0.636	6.36	1.250	0.813	3.125
AI LWH 200	2"	5	0.977	4.89	1.250	0.813	3.563
AI LWH 250	2 1/2"	10	1.955	19.55	1.625	1.188	4.125
AI LWH 300	3"	5	2.831	14.16	1.750	1.250	4.938
AI LWH 400	4"	5	3.953	19.77	1.938	1.375	6.188