



ATLANTIC Solutions
By Atlantic Industrial

LED LIGHTING

www.atlanticind.net

Your **American** Partner

With extensive inventory available in multiple U.S. locations, Atlantic can deliver the lighting products your customers need—when they need them. Our products are always in stock and ready for fast delivery.



5 USA Manufacturing Locations

- Tampa, FL
- Memphis, TN
- Walden, NY
- Cerritos, CA
- Vancouver, WA

98-3-1 Rapid Ship

- 98% Fill Rate
- 3 Day Lead Time
- 1 Piece Minimum Order Quantity



Lighting the World, **Together**

ATLANTIC Solutions
By Atlantic Industrial

12802 Commodity Place
Tampa, FL 33626
t: 813-664-9700
e: sales@atlanticind.net

LED Sports Lighter/ Architectural Flood


LEDicated

NEW!



AISP52 Series

- 294-584 Input Watts
- 29,500-65,000 Lumens
- NEMA 2x2, 3x3, 4x4, 5x5
- Adjustable Mounting Bracket
- Replaces up to 1500w MH




DIMENSIONS

FLOOD LIGHTING




SPORTS LIGHTING




NEMA 5X5

Maximum Center
Beam Candlepower =
117,631 Candela




NEMA 4X4

Maximum Center
Beam Candlepower =
167,213 Candela



NEMA 3X3

Maximum Center
Beam Candlepower =
463,808 Candela



NEMA 2X2

Maximum Center
Beam Candlepower =
577,244 Candela

ATLANTIC Solutions
By Atlantic Industrial

12802 Commodity Place
Tampa, FL 33626
t: 813-664-9700
e: sales@atlanticind.net





LED Gooseneck Lighting

3

Easy Steps to Specify



AIVP53Q
Fixture

+



Arm



AIVS30A
Shade

=



Complete Unit

8 Luminaires - 5 Arms



AIVP53Q



AIVP53Q
with Symmetric
Shade

AIVP53Q
with Asymmetric
Shade

Gooseneck LED luminaires provide a wide range of lumen outputs and photometric distributions to provide accent lighting throughout the project.

- Luminaires are available with 3K, 4K and 5K CCT
- Super Durable Powdercoat finish in 4 colors
- Custom color on special order.
- LED 18w-43w; 50w to 175w HID replacement
- CSA: Listed for Wet Locations, IP66



AIKH15Q

AIAS20Q



Gooseneck LED lighting allows the designer to create multitudes of design looks with differing lighting effects.

Arms are available in 5 different shapes and lengths to meet projects needs for wall accent lighting. Two mounting plate options add strength and durability.

Model	Length
AIGNA013 Classic Hook	36=36"
	30=30"
AIGNA023 Straight	30=30"
	24=24"
	18=18"
AIGNA033 Straight Offset	12=12"
	30=30"
AIGNA043 Straight Rise	24=24"
	30=30"
AIGNA053 Round Hook	30=30"
	24=24"
	18=18"

AILV1A0Q



AIFB1C3



AILV1A0Q



AIFL20L

ATLANTIC Solutions
By Atlantic Industrial

12802 Commodity Place
Tampa, FL 33626
t: 813-664-9700
e: sales@atlanticind.net



Vibrant accent
lighting in static **Blue,**
Green, Red and **Amber**
LED fixtures.

COLORLED

Available in Area, Flood, and Wall Mount. Wide and narrow beams.



AIAD25Q
Area-Wall-Flood



AIWCTRC3
Cylinders



**AITV2C3/
AITV3C3**
Wall & Flood



AIFB1C3
Spot & Flood



AIFL20C3
Flood



Kitty Hawk Family
AIKH15Q, AIKH25Q, AIKH45Q
Area-Wall-Flood



ATLANTIC Solutions
By Atlantic Industrial

12802 Commodity Place
Tampa, FL 33626
t: 813-664-9700
e: sales@atlanticind.net



Allora Series

Area & Site Lighting

The Allora LED Post Top fixtures' aesthetically pleasing appearance complements many architectural styles while providing energy-saving, long-lasting lighting for parking areas, walkways, common areas, and street lighting applications for retail and commercial properties. The Small and Large Round, and Large Square Allora fixtures are accompanied by matching bollards and wall sconces for a unified look across the entire property.



Allora Large Square Area Light
AIPFS80Q
108-293 Input Watts; 7,400-33,000 Lumens
Replaces up to 1,000w HID



Allora Small Round Area Light
AIPF70Q & AIPF71Q
39-86 Input Watts; 2,440-8,400 Lumens
Replaces up to 250w HID



Allora Large Round Area Light
AIPF80Q & AIPF81Q
108-293 Input Watts; 7,400-33,000 Lumens
Replaces up to 1,000w HID



AIAS30Q
Shown with AIASMA12
Twin Pole Mount Arm



AIAS30Q
Shown with AIASWM11
Wall Mount Arm

The Allora AIAS30 decorative pendant luminaire combines contemporary style and LED technology for site lighting.

- Full Cutoff Type III and V optics
- Clear Polycarbonate or SoftLED low glare diffusers
- Mounting heights - 12 to 25 feet
- 39-87 Input Watt; 2,990-9,700 Lumens
- 70w to 250w HID replacement
- 3-pin, 5-pin and 7-pin twist lock photocell or motion sensor
- CSA: Listed for Wet Locations, IP66



Allora II Series

Area & Site Lighting

The new Allora II Series features a sleek, modern Full Cutoff design while providing energy-saving, long-lasting LED lighting with four optical distributions. The single and dual arm post top fixtures are complemented by matching bollards, wall, canopy, pendant and garage mounts, and single arm pole side-mounted fixtures.



Allora II Small Round & Square Pole/Wall Mount
AIAFR20Q & AIAFS20Q
19 Input Watts; 2,090 Lumens
Replaces up to 70w HID



Allora II Round & Square Pole/Wall Mount
AIAFR30Q & AIAFS30Q
41-156 Input Watts; 5,100-21,000 Lumens
Replaces up to 400w HID



Allora II Round Post Tops
AIAFR31Q & AIAFR32Q
41-156 Input Watts; 4,600-19,500 Lumens
Replaces up to 400w HID



Allora II Round & Square Canopy
AIAFRC30Q & AIAFSC30
42-160 Input Watts; 4,800-21,600 Lumens
Replaces up to 400w HID



Allora II Round Garage Lighter
AIAFRC30QL
42-114 Input Watts; 5,400-10,400 Lumens
Replaces up to 400w HID



Allora II Round & Square Wall Sconce
AIAFRWS20Q & AIAFSWS20Q
19 Input Watts; 2,170 Lumens
Replaces up to 70w HID



Allora II Round & Square Canopy
AIAFRC30Q-PA & AIAFSC30Q-PA
41-156 Input Watts; 5,100-21,000 Lumens
Replaces up to 400w HID



Allora II Round & Square Bollards
AIAFRB20Q & AIAFSB20Q
13-27 Input Watts; 1,400-3,320 Lumens
Replaces up to 70w HID



Allora II Square Post Tops
AIAFS31Q & AIAFS32Q
41-156 Input Watts; 4,600-19,500 Lumens
Replaces up to 400w HID

Kensington Historic Post Top Luminaires



Standard



Deluxe



Premium

LED Kensington
AIPB2Q

41-87 Input Watts. 2,390-5,500 Lumens
Replaces up to 250w HID

The AIPB2 Series combines LED technology
with Historic style.

- IES Types III and V optics
- Ideal mounting heights are 12 to 20 feet
- CSA: Listed for Wet Locations, IP66
- Button photocell or motion sensor
- Multiple finial tops



AIPB2Q

Shown with AIPADAB
Twin Pole Mount Arm
and Decorative Base

AIPARF
4" Fluted
Aluminum
Pole



AIPADAB
Twin Arm



AIPB24A4B
Decorative Base

Decorative Aluminum Fluted Anchor Base and Direct Burial 4" Poles

- AIPARF416ABB - Anchor Base up to 16 ft.
- AIPARF422DBB - Direct burial up to 16 ft. above grade
- Reinforced hand-hole and cover
- Decorative clamshell base available

ATLANTIC Solutions
By Atlantic Industrial

12802 Commodity Place
Tampa, FL 33626
t: 813-664-9700
e: sales@atlanticind.net

Amber Luminaires with Approved Shielding

KEEP IT LOW


Lower Mounting Heights Are Better

KEEP IT SHIELDED


Glare Control Minimizes Spreading Light

KEEP IT LONG

560nm Long Wavelength Or Higher



TURTLE-SAFE

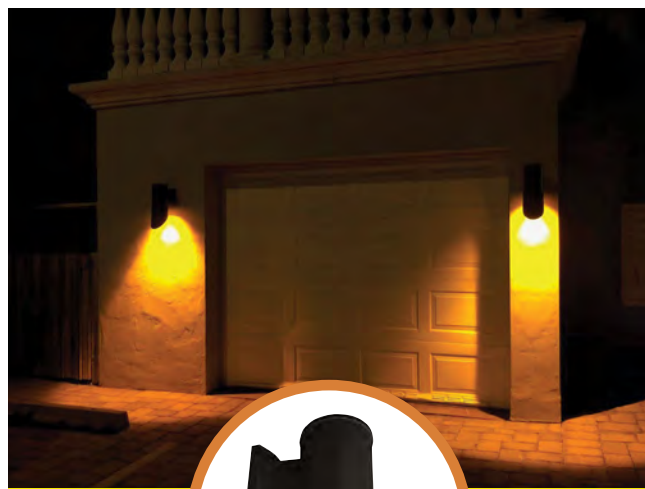

AIWCTRS with
Glare Shield
Installation in
South Florida


Wall Mounted Shielded Fixtures



Area Lighting and Ceiling Mount




Amber LED Spectral Chart

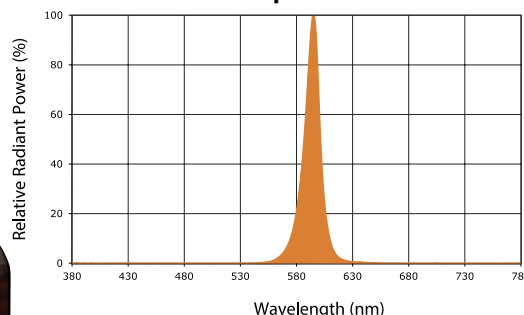

Amber Bollards

Includes factory installed 270° shielding

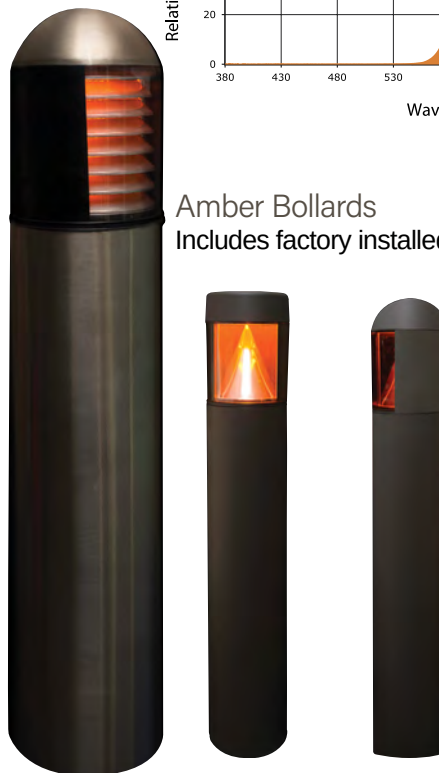

**Florida Wildlife
Approved**
Certification #2018-001
myfwc.com

Refer to Atlantic website for dedicated product page.

ATLANTIC Solutions
By Atlantic Industrial

12802 Commodity Place
Tampa, FL 33626
t: 813-664-9700
e: sales@atlanticind.net



Amber Lighting

The LED Amber Series offers amber LED operating between 585 and 595 Nanometers (nm), which is greater than the 560nm required for wildlife protection. They are also used in security applications requiring amber lighting.



Amber Mini Kitty Hawk
AIKH15Q-AM
25-38 Input Watts; 1,160-1,740 Lumens
Replaces up to 175w HID



Amber Small Kitty Hawk
AIKH25Q-AM
81 Input Watts; 2,700 Lumens
Replaces up to 400w HID




Amber Garage Lighter
AIVN55Q-AM
43-57 Input Watts; 1,880-2,300 Lumens
Replaces up to 175w HID



Amber Allora Small Round Area Light
AIPF70Q-AM & AIPF71Q-AM
82 Input Watts; 1,700-2,100 Lumens
Replaces up to 250w HID



Amber Allora Small Round Canopy
AICP30Q-AM
82 Input Watts; 1,880-2,000 Lumens
Replaces up to 175w HID

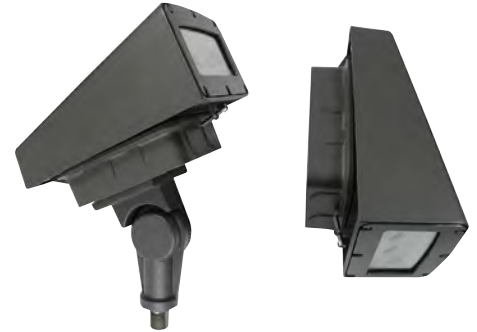

Amber Small 2Gen LED Slimline
AITV2C3-AM
21-43 Input Watts;
Replaces up to 175w HID



Amber Mini Wall Pack
AIWP14-AM
14 Input Watts;
Replaces up to 70w HID



Shown with
Optional
Visor

Amber 2Gen Up or Down Wall Cylinder
AIWCTRSC3-AM
21 Input Watts;
Replaces up to 100w HID



Amber Small Wall Pack Full Cutoff
AIWPC12Q-AM
25 Input Watts; 800 Lumens
Replaces up to 175w HID



Amber Medium Wall Pack Full Cutoff
AIWPC15Q-AM
40 Input Watts; 1,300 Lumens
Replaces up to 250w HID

Amber Allora Decorative Pendant Luminaire

82 Input Watts; 2,400 Lumens; Replaces up to 250w HID



Wall Mount
AIAS30Q-AM & AIASWM11

Single Pole Mount
AIAS30Q-AM & AIASMA11


Dual Pole Mount
AIAS30Q-AM & AIASMA12



Amber 48" Linear LED Die Cast
AILV4AQ-AM
93 Input Watts; Replaces up to 250w HID

Amber LED Bollards

17 Input Watts; 190-360 Lumens; Replaces up to 70w HID

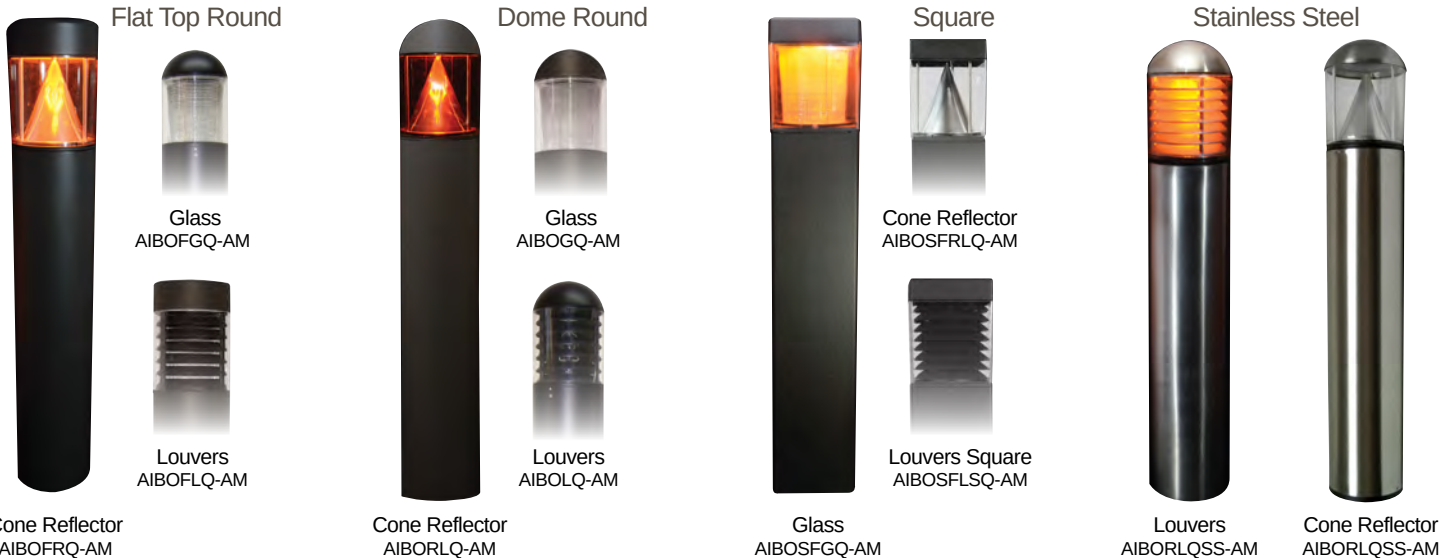

Cone Reflector
AIBOFRQ-AM

Cone Reflector
AIBORLQ-AM


Glass
AIBOSFGQ-AM

Louvers
AIBORLQSS-AM

Cone Reflector
AIBORLQSS-AM

Amber LEDicated Vaporproof

27 Input Watts; 1,200 Lumens; Replaces up to 175w HID

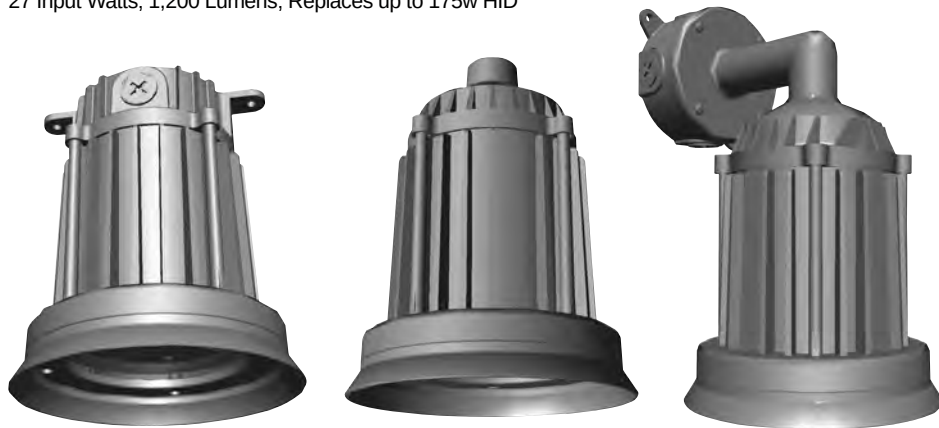

Box Mount
AIVB53Q-AM

Pendant Mount
AIVP53Q-AM

Wall Mount
AIVW53Q-AM



Amber Large Box Mount
Classic Vaporproof
AIVB43Q-AM

14 Input Watts; 380 Lumens;
Replaces up to 70w HID

KITTY HAWK FAMILY

ARCHITECTURAL AREA, FLOOD & WALL LIGHTING

Uniform Architectural Appearance and Seamless Aesthetic Style



AIKH55Q

354-557 Input Watts;
23,000-74,500 Lumens
Replaces up to 1,500w HID

AIKH45Q

99-256 Input Watts;
11,100-37,000 Lumens
Replaces up to 1,000w HID

AIKH25Q

68-121 Input Watts;
3,840-16,000 Lumens
Replaces up to 400w HID

AIKH15Q

24-43 Input Watts
1,560-4,900 Lumens
Replaces up to 175w HID

Versatile, Multiple Optics, Variety of Mounting Options




LED Architectural
Wall Cutoff

- 4 sizes, multiple wattages replacing 50-1500w HID
- Mounting heights 16 to 50 feet
- IES Type I, II, III, IV & V Optics
- IP66 Sealed Optics, 3K, 4K, 5K CCT

Mounting Options:




IES LIGHTING DISTRIBUTIONS

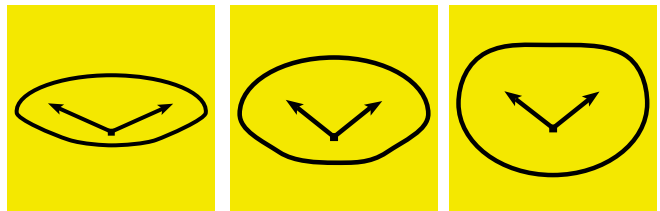


Type I

Type II

Type III




Type IV




Type V


FLOOD LIGHT BEAM OPTIONS



100°H x 70°V
NEMA 7X6




110°H x 100°V
NEMA 7X7



35°H x 35°V
NEMA 4X4

ATLANTIC Solutions
By Atlantic Industrial

12802 Commodity Place
Tampa, FL 33626
t: 813-664-9700
e: sales@atlanticind.net

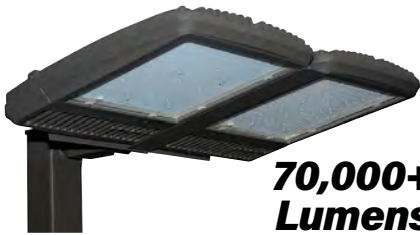

**70,000+
Lumens**

TurboKH Area Light
AIKH55Q
354-557 Input Watts; 23,000-74,500 Lumens
Replaces up to 1,500w HID



Mini Kitty Hawk Area Light
AIKH15Q
24-43 Input Watts; 1,560-7,500 Lumens
Replaces up to 175w HID




Small Kitty Hawk Area Light
AIKH25Q
68-121 Input Watts; 3,840-16,000 Lumens
Replaces up to 400w HID



Large Kitty Hawk Area Light
AIKH45Q
99-256 Input Watts; 11,100-37,000 Lumens
Replaces up to 1,000w HID



16" Area Light
AIAL35Q
187-286 Input Watts; 18,000-34,500 Lumens
Replaces up to 1,000w HID

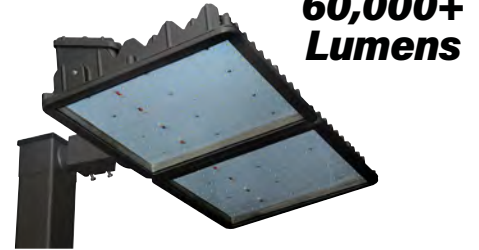

**60,000+
Lumens**

TurboAL Area Light
AIAL55Q
386-568 Input Watts; 35,500-69,500 Lumens
Replaces up to 1,500w HID



Small Street Light
AIST30Q
180 Input Watts; 17,500-21,500 Lumens
Replaces up to 400w HID



Large Street Light
AIST35Q
301 Input Watts; 26,000-35,500 Lumens
Replaces up to 1,000w HID



Varistar Area Light
AIAD25Q
61-121 Input Watts; 6,500-14,500 Lumens
Replaces up to 400w HID

Allora II Area Lighting



Allora II Small Round & Square
Pole/Wall Mount
AIAFR20Q & AIAFS20Q
19 Input Watts; 2,090 Lumens
Replaces up to 70w HID



Allora II Round & Square
Pole/Wall Mount
AIAFS30Q & AIAFR30Q
41-156 Input Watts; 5,100-21,000 Lumens
Replaces up to 400w HID

2Gen Round & Square LED Bulkheads

Clean contemporary styled wall mount luminaires designed with highly efficient optics.

- The 2Gen Bulkhead family offers square and round luminaires with multiple faceplate designs.
- Ideal mounting heights are 8 to 20 feet.
- Coin plugs on all four sides provide easy conduit access and control options.
- IP66 sealed optics and driver compartment.
- LED arrays are designed specifically for each faceplate design for optimal output.



Open
AIWPR25OFQ
1,590-3,760 Lumens

13-27 Input Watts, Replaces up to 250w HID



Grid
AIWPR25GRQ
1,350-3,200 Lumens



Half-Cutoff
AIWPR25HCQ
1,3020-3,140 Lumens



Open
AIWPS25OFQ
1,550-3,670 Lumens



Grid
AIWPS25GRQ
1,310-3,120 Lumens



Half-Cutoff
AIWPS25HCQ
1,540-3,360 Lumens

Moonglow



Small
AIWPR30Q
20 Input Watts; 1,870 Lumens
Replaces up to 100w HID



Large
AIWPR32Q
30 Input Watts; 2,640 Lumens
Replaces up to 175w HID

The Eye Outdoor Decorative Wall Pack & Emergency Light



The Eye LED Wall Pack
AIWPDLEDC3
The Eye Emergency Light
AIWPDLEDMC3
12 Input Watts; 170/750 Lumens
Replaces Compact Fluorescent Systems

Dart Round & Square Bulkheads

27 Input Watts, Replaces up to 100w HID



Half-Cutoff
AIWPR22HCQ
1,770-1,840 Lumens



Grid
AIWPR22GRQ
2,020-2,110 Lumens



Half-Cutoff
AIWPS22HCQ
1,600 Lumens



Grid
AIWPS22GRQ
1,800 Lumens



Open
AIWPS22OFQ
2,020 Lumens

AIB5 Series Full Cutoff



Full Cutoff Wall Mount
AIDW5Q & AIWBB5Q
13-18 Input Watts; 480-760 Lumens
Replaces up to 70w HID



Allora Wall Sconce

Allora LED Wall Sconce
AIWBB3Q & AIWBB4Q
18-27 Input Watts; 1,460-2,600 Lumens
Replaces up to 70w HID

2Gen LED Cylinders



2Gen LED Up/Down
Wall Cylinder
AIWCTRDC3
40 Input Watts; 4,400-4,600 Lumens
Replaces up to 175w HID



2Gen LED Up or Down
Wall Cylinder
AIWCTRSC3
20 Input Watts; 2,210-2,370 Lumens
Replaces up to 100w HID

Allora II Wall Sconce



Allora II Small Round or
Square Wall Mount
AIAFR20Q & AIAFS20Q
19 Input Watts; 2,090 Lumens
Replaces up to 70w HID

Allora II Round or
Square Wall Sconce
AIAFRWS20Q &
AIAFSWS20Q
19 Input Watts; 2,170 Lumens
Replaces up to 70w HID



Allora II Round or Square
Wall Mount
AIAFR30Q & AIAFS30Q
41-156 Input Watts; 5,100-21,000 Lumens
Replaces up to 400w HID

Full Cutoff Wall Accent



Dome Wall Pack
AIWPC36Q
26-53 Input Watts; 2,230-5,100 Lumens
Replaces up to 250w HID




Crescent Wall Sconce
Down Light
AIWP35Q
26-53 Input Watts; 2,230-5,100 Lumens
Replaces up to 250w HID

Up/Down Wall Accent



Crescent II Down or
Up/Down Wall Sconce
AIWP34Q
17-35 Input Watts; 1,700-3,400 Lumens
Replaces up to 70w HID



Crescent Up/Down
Wall Sconce
AIWP36Q
52 Input Watts; 5,500-6,000 Lumens
Replaces up to 250w HID

LED Architectural Wall Cutoffs

Turbo Full Cutoff



Turbo Full Cutoff Wall Mount
AIWPC45Q
93-188 Input Watts; 9,700-21,500 Lumens
Replaces up to 400w HID



Small Turbo Full Cutoff Wall Mount
AIWPC44Q
19-93 Input Watts; 2,330-9,300 Lumens
Replaces up to 175w HID

Kitty Hawk Family

Architectural wall mount cutoff luminaires complete the Kitty Hawk family.

- Available with Full Cutoff IES Types I, II, III, IV and V optics.
- Ideal mounting heights are 12 to 30 feet.
- Multiple mounting options including wall bracket, arm and yoke.
- LED 43w-281w; 100w to 1000w HID replacement.
- Control options include 3-pin, 5-pin or 7-pin twist lock photocell receptacle or motion sensor.
- 1-10V dimming driver standard, 120-277, 347, and 480VAC inputs available.




Large Kitty Hawk Wall Mount
AIKH45Q
99-256 Input Watts; 11,100-37,000 Lumens
Replaces up to 1,000w HID



Small Kitty Hawk Wall Mount
AIKH25Q
68-121 Input Watts; 3,840-16,000 Lumens
Replaces up to 400w HID



Mini Kitty Hawk Wall Mount
AIKH15Q
24-43 Input Watts; 1,560-7,500 Lumens
Replaces up to 175w HID



16" Wall Light
AIAL35Q
187-286 Input Watts; 18,000-34,500 Lumens
Replaces up to 1,000w HID

2Gen Full Cutoff Wall Packs



Large Slimline
AITV3C3
56-80 Input Watts; 6,600-8,300 Lumens
Replaces up to 400w HID



Small Slimline
AITV2C3
21-43 Input Watts; 2,310-4,100 Lumens
Replaces up to 175w HID

Full Cutoff LED Wall Packs



Small Wall Pack Full Cutoff
AIWPC12Q
16-24 Input Watts; 1,400-2,430 Lumens
Replaces up to 175w HID



Medium Wall Pack Full Cutoff
AIWPC15Q
27-54 Input Watts; 2,740-6,000 Lumens
Replaces up to 400w HID



Large Wall Pack Full Cutoff
AIWPC20Q
41-61 Input Watts; 4,100-7,100 Lumens
Replaces up to 400w HID

LED Utility/Wall Packs

Prismatic Glass Wall Pack



Large Wall Pack
AIWP20Q
32-67 Input Watts; 4,400-8,800 Lumens
Replaces up to 400w HID



Medium Wall Pack
AIWP15Q
27-54 Input Watts; 3,500-8,000 Lumens
Replaces up to 250w HID



Small Wall Pack
AIWP12Q
18-28 Input Watts; 2,000-3,200 Lumens
Replaces up to 100w HID



Mini Wall Pack
AIWP13Q
22 Input Watts; 1,550 Lumens
Replaces up to 70w HID

2Gen Dusk-to-Dawn Utility Light

- Ideal mounting heights are 10 to 20 feet.
- Integral photocell for automatic operation during hours of darkness.
- Die cast heat sink housing with polycarbonate impact resistant lens.



2Gen Dusk-To-Dawn
Utility Light
AISC25C3
42 Input Watts; 3,880 Lumens
Replaces up to 175w HID

**Durable
construction for
long life.**

Polycarbonate Wall Packs



Mini Entry Light
AIWP7Q
14 Input Watts; 1,490 Lumens
Replaces up to 70w HID



Square Entry Light
AIWP8Q
10 Input Watts; 780 Lumens
Replaces up to 70w HID



Round Entry Light
AIWP9Q
9 Input Watts; 680 Lumens
Replaces up to 70w HID



Mini Wall Pack
AIWP14Q
14 Input Watts; 940-1,060 Lumens
Replaces up to 70w HID



Bravo Wall Pack
AIWPB40Q
37 Input Watts; 3,120 Lumens
Replaces up to 175w HID



Small Wall Pack
AIWP10Q
28 Input Watts; 2,480-2,580 Lumens
Replaces up to 100w HID

Semi-Cutoff with Prismatic Glass




Small Accord Semi-Cutoff
AIWPA15Q
44 Input Watts; 3,450 Lumens
Replaces up to 175w HID



Large Accord Semi-Cutoff
AIWPA25Q
69 Input Watts; 5,000 Lumens
Replaces up to 400w HID



Medium Semi-Cutoff
AIWH15Q
44 Input Watts; 4,800-5,000 Lumens
Replaces up to 250w HID



Large Accord Semi-Cutoff
AIWH20Q
67 Input Watts; 7,100 Lumens
Replaces up to 400w HID

Semi-Cutoff with Flat Tempered Glass

LED Flood Lighting



**70,000+
Lumens**

TurboKH Flood Light

AIKH55Q

354-557 Input Watts; 40,500-71,500 Lumens
Replaces up to 1,500w HID



Large Kitty Hawk Flood

AIKH45Q

99-256 Input Watts; 12,000-37,000 Lumens
Replaces up to 1,000w HID



Small Kitty Hawk Flood

AIKH25Q

68-121 Input Watts; 6,600-16,000 Lumens
Replaces up to 400w HID



Mini Kitty Hawk Flood

AIKH15Q

24-43 Input Watts; 2,620-7,500 Lumens
Replaces up to 175w HID



Varistar Flood Light

AIAD25Q

61-121 Input Watts; 6,500-14,500 Lumens
Replaces up to 400w HID



16" Flood Light

AIAL35Q

187-286 Input Watts; 17,500-34,500 Lumens
Replaces up to 1,000w HID



**60,000+
Lumens**

TurboAL Flood Light

AIAL55Q

368-568 Input Watts; 35,500-69,000 Lumens
Replaces up to 1,500w HID

LED Flood Lighting



2Gen LED Bullet
AIFB1C3
20 Input Watts; 2,330-2,380 Lumens
Replaces up to 100w HID



2Gen LED Small Bullet
AIFB2C3
9 Input Watts; 900 Lumens
Replaces up to 50w HID



2Gen Small Flood Light
AIFL20L
21 Input Watts; 2,300-2,330 Lumens
Replaces up to 70w HID



Small 2Gen LED Slimline Flood
AITV2C3
21-43 Input Watts; 2,310-4,100 Lumens
Replaces up to 175w HID



Large 2Gen LED Slimline Flood
AITV3C3
56-80 Input Watts; 6,600-8,300 Lumens
Replaces up to 400w HID



Round Back Flood
AIFL61Q
44 Input Watts; 4,100-4,500 Lumens
Replaces up to 175w HID



Deluxe Small Flood
AIFL32Q
25 Input Watts; 2,120-2,790 Lumens
Replaces up to 100w HID



Medium Flood
AIFL45Q
41 Input Watts; 3,720-4,800 Lumens
Replaces up to 175w HID



Large Flood
AIFL65Q
75 Input Watts; 6,800-7,500 Lumens
Replaces up to 400w HID

LED Bollards



AIB3Q

Allora Round & Square LED Bollard
AIB3Q & AIB4Q
18-27 Input Watts;
1,460-2,600 Lumens
Replaces up to 70w HID

AIB4Q



AIAFRB20Q

Allora II Round & Square Bollards
AIAFRB20Q & AIAFSB20Q
13-27 Input Watts;
1,400-3,320 Lumens
Replaces up to 70w HID



AIAFSB20Q



180° & 120° Shield Available

LED Full Cutoff Bollard
AIB5Q
13-18 Input Watts;
480-760 Lumens
Replaces up to 70w HID

LED Swan
AIB9Q
14-20 Input Watts;
1,400-2,400 Lumens
Replaces up to 70w HID



AIB1BPTQ
Round Dome
Pillar Top



AIB2CPTQ
Square Pyramid
Pillar Top



AIB1PTQ
Round Flat
Pillar Top



AIB2PTQ
Square Flat
Pillar Top

Pillar Tops
AIB1PTQ, AIB1BPTQ,
AIB2PTQ & AIB2CPTQ
18-37 Input Watts;
860-3,260 Lumens
Replaces up to 70w HID



Low Brightness Visual Comfort



Low Profile Pathway Bollard
AINB5Q
13-18 Input Watts;
480-760 Lumens
Replaces up to 70w HID



AIB1Q



AIB2Q

Round & Square
LED Bollards
AIB1Q & AIB2Q
18-37 Input Watts;
860-3,260 Lumens
Replaces up to 70w HID



**AIBKH1Q Mini Kitty Hawk
Single Bollard**



**AIBKH2Q Mini Kitty Hawk
Twin Bollard**

Mini Kitty Hawk Bollard
AIBKH1Q & AIBKH2Q
24-86 Input Watts;
2,560-9,800 Lumens
Replaces up to 400w HID


ATLANTIC Solutions
By Atlantic Industrial

12802 Commodity Place
Tampa, FL 33626
t: 813-664-9700
e: sales@atlanticind.net

LED Bollards, Landscape Lighting & Vaporproof

LED Bollards

12-24 Input Watts; Up to 2,460 Lumens; Replaces up to 70w HID

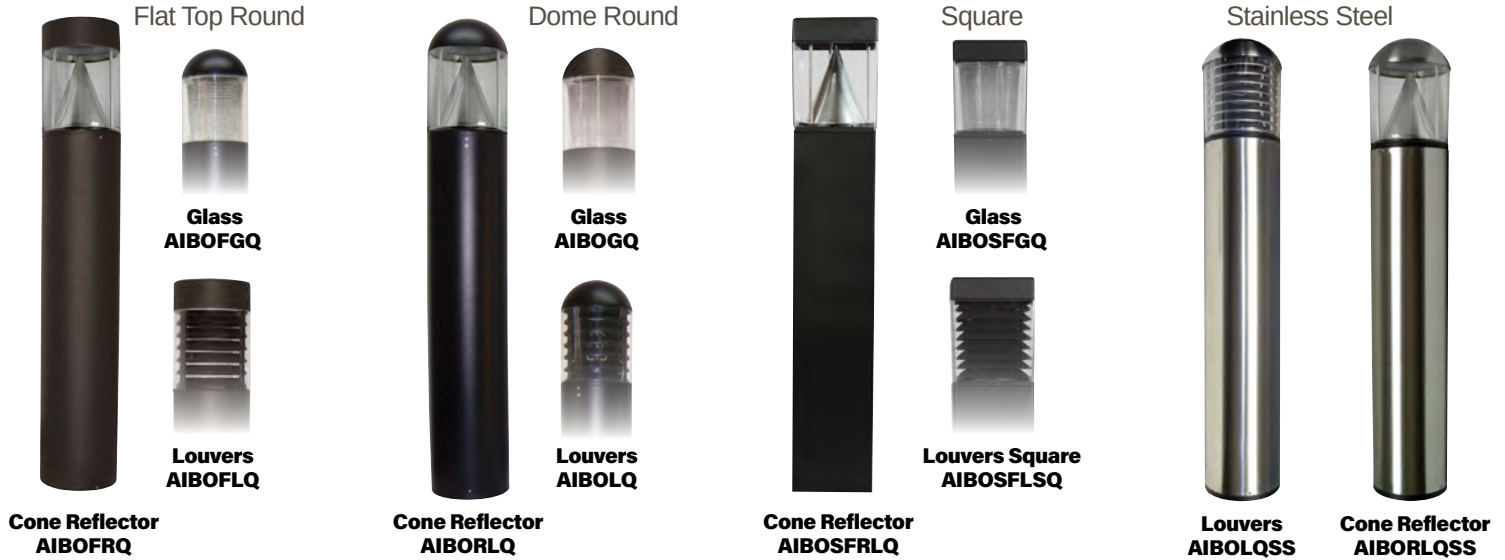

Bollard Accessories

Fits all Bollards offered




Landscape Lighting



LEDicated Vaporproof

27 Input Watts; 2,510-3,390 Lumens; Replaces up to 175w HID

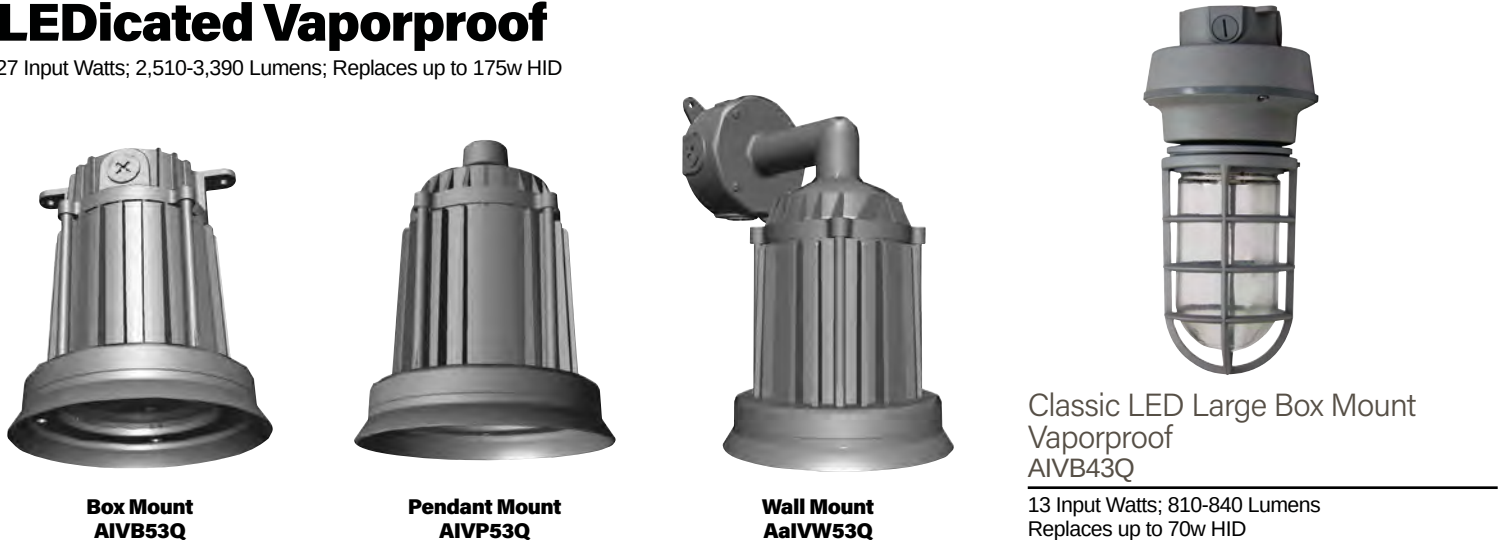

LED Garage, Canopy and Surface Mounts



16" Recessed Canopy/Soffit

AICP10QQ

34-75 Input Watts; 4,600-10,400 Lumens
Replaces up to 250w HID



Low Profile Medium

Surface Mount

AIVN34Q

27 Input Watts; 2,780-2,890 Lumens
Replaces up to 100w HID



Low Profile Round

Surface Mount

AIVNR34Q

39 Input Watts; 4,600-4,800 Lumens
Replaces up to 100w HID



Low Profile Large

Surface Mount

AIVN44Q

54 Input Watts; 5,500-5,800 Lumens
Replaces up to 175w HID

Allora II Canopy & Garage Lighter



Allora II Round
Garage Lighter

AIAFSC30QL

42-114 Input Watts; 5,400-10,400 Lumens
Replaces up to 400w HID



Allora II Round &
Square Canopy

AIAFRC30Q & AIAFSC30Q

42-160 Input Watts; 4,800-21,600 Lumens
Replaces up to 400w HID



With Pendant
Mount Option



16" & 20" Gas Station Canopy

AICP16QQ (16") & AICP20Q (20")

AICP16QQ: 127 Input Watts; 18,000 Lumens
Replaces up to 250w HID
AICP20Q: 206 Input Watts; 30,000 Lumens
Replaces up to 400w HID



Allora Canopies

AICP30Q (Small) & AICP32Q (Large)

AICP30Q: 39-86 Input Watts; 3,110-7,900 Lumens
Replaces up to 250w HID

AICP32Q: 108-293 Input Watts; 7,400-33,000 Lumens
Replaces up to 1000w HID



Garage Lighter

AIVN55Q

Available with Sensor.

34-75 Input Watts; 4,600-10,400 Lumens
Replaces up to 175w HID



Garage Square

AIVGS40Q

Available with Sensor.

40-84 Input Watts; 4,900-10,600 Lumens
Replaces up to 175w HID

Vandal Resistant

25-62 Input Watts, Replaces up to 175w HID



Vandal Resistant
Garage Lighter

AIVNGL40Q

7,200-7,500 Lumens



Large Shallow
Canopy

AIVN43Q

5,300-5,500 Lumens



Large Canopy

AIVN40Q

6,100-6,300 Lumens



AISLS7Q



AISLR7Q



AISLS7Q
Reverse Side

7" LED Surface Mount Retrofit

AISLR7Q & AISLS7Q

12 Input Watts; 850-880 Lumens

Replaces up to 100w incandescent and all CFL



Hazardous Location LED Luminaire

Hazardous Location
LED Luminaire
AIHLPQ
64 Input Watts; 9,000 Lumens




**Flood Shown with 25°
Adjustable Yoke**



Suspended



Ceiling Mount



**Shown with 25°
Wall Mount**



**Shown with 90°
Wall Mount**



**Shown with 25°
Stanchion Mount**



**Shown with 90°
Stanchion Mount**



Hazardous Location LED Flood



Hazardous Location
LED Flood
AIHLFQ
140 Input Watts; 15,000 Lumens



Hazardous Location Linear LED Die Cast



AIHLV1AHQ



AIHLV1AOQ



AIHLV1AVQ

Hazardous Location 12"
Linear LED Die Cast
AIHLV1AOQ, AIHLV1AHQ, &
AIHLV1AVQ
26-41 Input Watts; 2,280-5,600 Lumens
Replaces up to 175w HID



Hazardous Location 24" Linear
LED Die Cast
AIHLV2AOQ
58-77 Input Watts; 5,700-10,300 Lumens
Replaces up to 250w HID



Hazardous Location 48" Linear
LED Die Cast
AIHLV4AOQ
123-152 Input Watts; 13,500-20,000 Lumens
Replaces up to 400w HID

LED High/Low Bays



16" Highbay

AIHB44Q

179 Input Watts; Replaces up to 400w HID

Clear Glass: 19,500-20,000 Lumens

Conical Lens: 17,500-18,500 Lumens

Acrylic Drop Lens: 16,000-16,500 Lumens

Narrow (30° Beam): 20,500 Lumens



22" Highbay

AIHB45Q

296 Input Watts; Replaces up to 1,000w HID

Clear Glass: 31,500-32,500 Lumens

Conical Lens: 31,500-32,500 Lumens

Acrylic Drop Lens: 30,500-32,500 Lumens

Narrow (30° Beam): 34,000 Lumens



16" & 22" LED Aisle Lighter

16" AIHB44QK

22" AIHB45QK

AIHB44QK: 179 Input Watts; 19,000 Lumens

Replaces up to 400w HID

AIHB45QK: 291 Input Watts; 31,500 Lumens

Replaces up to 1,000w HID

Dynamic 2:1 Replacement; High Performance Optics



2Gen Low Profile 16" LED Highbay

AIHB30C3

123-197 Input Watts; 19,500-25,500 Lumens

Replaces up to 400w HID



2Gen Low Profile 16" LED Highbay with Uplight

AIHB31C3

123-197 Input Watts; 14,000-27,000 Lumens

Replaces up to 400w HID



TurboHB Highbay

AIHB55Q

592 Input Watts; Replaces up to 1,500w HID

Clear Glass: 59,500-65,000 Lumens

Narrow (30° Beam): 67,500 Lumens



Microwave Motion Sensor

AIP17116

Sensor available for all High Bays models on this page.

LED High/Low Bays



Linear Highbay (120w)
AIHBLC3
 117 Input Watts; 17,000 Lumens
 Replaces up to 250w HID
 Emergency Battery Backup Available



Linear Highbay (240w)
AIHBLC3
 234 Input Watts; 33,500 Lumens
 Replaces up to 400w HID
 Emergency Battery Backup Available



Linear Highbay (320w)
AIHBLC3
 312 Input Watts; 44,500 Lumens
 Replaces up to 1000w HID
 Emergency Battery Backup Available



Allora II Round & Square Canopy
AIAFRC30Q-PA & AIAFSC30Q-PA
 41-156 Input Watts; 5,100-21,000 Lumens
 Replaces up to 400w HID



Small Allora Canopy
AICP30Q
 39-86 Input Watts; 3,110-7,900 Lumens
 Replaces up to 250w HID



Allora Canopy
AICP32Q
 108-190 Input Watts; 8,800-17,500 Lumens
 Replaces up to 400w HID



Vandal Resistant Low Bay
AIVNGL40Q
 62 Input Watts; 7,200-7,500 Lumens
 Replaces up to 175w HID



12" Linear LED Die Cast
AILV1AOQ, AILV1AHQ, & AILV1AVQ
 26-41 Input Watts; 2,280-5,600 Lumens
 Replaces up to 175w HID



24" Linear LED Die Cast
AILV2AOQ
 58-77 Input Watts; 5,700-10,300 Lumens
 Replaces up to 250w HID



48" Linear LED Die Cast
AILV4AOQ
 123-152 Input Watts; 13,500-20,000 Lumens
 Replaces up to 400w HID




Washdown
AIAG24Q
 52 Input Watts; 6,900 Lumens
 Wet Locations

Architectural Poles for LED Luminaires


Straight Square Steel Poles AIPSSS Series

Shown with "P2" Tenon without Base Cover. Bronze Finish

AIPSSS Gauges



4" Square
• 7 Gauge
• 11 Gauge




5" Square
• 7 Gauge


Straight Round Aluminum Poles AIPSRA Series

Shown with "P3" Tenon with Base Cover. Black Finish

AIPSRA Gauges




4" Round
5mm (0.196")




5" Round
5mm (0.196")


Pole Top Options




P3
2 7/8" x 3" Tenon



P2
2 7/8" x 4" Tenon



D2
Drilled
2 @ 180°



D4
Drilled
4 @ 180°

Pole Availability

Pole Type	Length									
	10	12	14	16	18	20	22	25	28	30
4" Straight Square Steel, 11 Ga	X	X	X	X	X	X	X	X		
4" Straight Square Steel, 7 Ga	X	X	X	X	X	X	X	X		
5" Straight Square Steel, 7 Ga	X	X	X	X	X	X	X	X	X	X
4" Straight Round Aluminum 5mm	X	X	X	X	X	X				
5" Straight Round Aluminum 5mm	X	X	X	X	X	X	X	X		

Notes:

1. Steel poles are ASTM-A500 Grade B, maximum yield strength, 46,000 PSI.
2. Aluminum poles are 6063-T6 Alloy.

Poles are available in a wide variety of lengths, wall thickness and diameters.

- Two piece square base cover and polycarbonate spring loaded top cover included.
- Poles are provided with reinforced hand-hole and cover.
- Four anchor bolts with leveling nuts and template are provided.
- Pole top tenon selections include 4" high x 2 3/8" or 3" high x 2 7/8" diameter.
- Poles can be drilled for side mount, polycarbonate plugs included.

See Page 8 for AIPARF Decorative Poles.

ATLANTIC Solutions
By Atlantic Industrial

12802 Commodity Place
Tampa, FL 33626
t: 813-664-9700
e: sales@atlanticind.net

Architectural Pole Accessories

Pole Top Fittings for Round or Square Poles:

Fit 2 1/2" (P2) Tenons



Single Spoke Bracket
AIPTSB1SZ



Twin Spoke Bracket, 90° Arms
AIPTSB290SZ



Twin Spoke Bracket, 180° Arms
AIPTSB2180SZ



Triple Spoke Bracket, 90° Arms
AIPTSB390SZ*



Triple Spoke Bracket, 120° Arms
AIPTSB3120SZ*



Quad Spoke Bracket, 90° Arms
AIPTSB490SZ*



Pole Tenon Adaptor
AIPASUNV

*Non-stock item. Consult factory for lead time.

Bullhorn Brackets for Round or Square Poles:

Fit 2 1/2" (P2) Tenons



180° Double Bullhorn
AIPRSD180BHZ



180° Triple Bullhorn
AIPRSTR180BHZ



180° Quad Bullhorn
AIPRSQ180BHZ

Tenon Adaptor:

Fit 2 1/2" (P2) Tenons



Retrofit Tenon Adaptor
AIPSRTNB

Vertical Tenon Pole Top Fitters:

Fits 4" Straight Square Steel Pole. 4" High Vertical Tenons, Fit 2 1/2" (P2) Tenons. Bronze Finish



4" Twin Square Vertical Tenon
AIPSS4TVTZ



4" Triple Square Vertical Tenon
AIPSS4TRVTZ



4" 180° Quad Square Vertical Tenon
AIPSS4Q180VTZ



4" 90° Quad Square Vertical Tenon
AIPSS4Q90VTZ

Vertical Tenon Pole Fitters:

Fits 4" Straight Square Steel Pole. Bronze Finish



4" Single Square Vertical Tenon
AIPSS4SVTZ



4" Single Square Vertical Tenon
AIPSS43SVTZ

Vertical Tenon Pole Top Fitters:

Fits 5" Straight Square Steel Pole. 4" High Vertical Tenons, Fit 2 1/2" (P2) Tenons. Bronze Finish



5" Twin Square Vertical Tenon
AIPSS5TVTZ



5" Triple Square Vertical Tenon
AIPSS5TRVTZ



5" 90° Quad Square Vertical Tenon
AIPSS4Q180VTZ

Vertical Tenon Pole Fitters:

Fits 5" Straight Square Steel Pole. Bronze Finish



5" Single Square Vertical Tenon
AIPSS5SVTZ



5" Single Square Vertical Tenon
AIPSS53SVTZ

Horizontal Tenon Pole Top Fitters:

Fits 4" Straight Square Steel Pole. Bronze Finish



4" 180° Twin Square Horizontal Tenon
AIPSS4T180HTZ



4" 90° Twin Square Horizontal Tenon
AIPSS4T90HTZ



4" 90° Triple Square Horizontal Tenon
AIPSS4TR90HTZ



4" 90° Quad Square Horizontal Tenon
AIPSS4Q90HTZ

Horizontal Tenon Pole Top Fitters:

Fits 5" Straight Square Steel Pole. Bronze Finish



5" 180° Twin Square Horizontal Tenon
AIPSS5T180HTZ



5" 90° Twin Square Horizontal Tenon
AIPSS5T90HTZ



5" 90° Quad Square Horizontal Tenon
AIPSS5Q90HTZ

Wall Mounting Bracket:

Bronze Finish




Wall Mount Bracket
AIPRSWMBZ




Wall Mount 90° Bracket
AIPRSWMB90Z

Vertical Tenon Pole Top Fitters:

Fits 4" Straight Round Aluminum Pole. Black Finish




2 3/8" Single Round Vertical Tenon (P2)
AIPSRA42B




2 7/8" Single Round Vertical Tenon (P3)
AIPSRA43B

Vertical Tenon Pole Top Fitters:

Fits 5" Straight Round Aluminum Pole. Black Finish



2 3/8" Single Round Vertical Tenon (P2)
AIPSRA52B



2 7/8" Single Round Vertical Tenon (P3)
AIPSRA53B

Your **American** Partner

With extensive inventory available in multiple U.S. locations, Atlantic can deliver the lighting products your customers need—when they need them. Our products are always in stock and ready for fast delivery.



5 USA Manufacturing Locations

- Tampa, FL
- Memphis, TN
- Walden, NY
- Cerritos, CA
- Vancouver, WA

98-3-1 Rapid Ship

- 98% Fill Rate
- 3 Day Lead Time
- 1 Piece Minimum Order Quantity




Lighting the World, **Together**

Atlantic

INDUSTRIAL®

A QSSI Company Since 1985

12802 Commodity Place
Tampa, FL 33626
813-664-9700



Visit us at www.atlanticind.net
for complete specifications.