


**AIHB45Q** | **L70**  
25°C | **299,000 Hours**

**22" LED Aisle Lighter**



**Microwave Sensor  
Factory Installed "M3"  
Option (120-277V Only)**

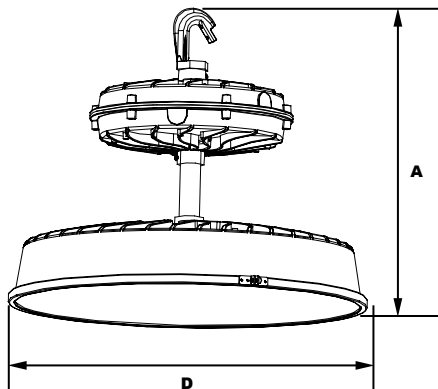

**Dimensions**

<b>Diameter (D)</b>	22¼" (565mm)
<b>Height (A)</b>	16¼" (413mm)

**Project Information:**

Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

The Atlantic 22" LED Aisle Lighter is designed to replace HID lighting systems from 400w to 1000w MH. Typical applications are medium and high stack warehouse and cold storage facilities. Suitable for 18 to 45 foot mounting heights based on light level and uniformity requirements.

**Specifications and Features:**

**Housing:**

Die Cast Aluminum Housing with External Heat Sinks for Cooler Operating Temperatures. Includes 4" Stem. Maximum Stem Length: 30 Feet.

**Listing & Ratings:**

CSA: Listed for Damp Locations, ANSI/UL 1598, 8750 (Lens Gasket Use Required); IP65 Sealed LED Compartment.

**Finish:**

White Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

**Lens:**

Tempered Clear Flat Glass Lens

**Mounting Options:**

Mount with Included 1" Die Cast Hook.

**LED:**

Aluminum Boards

**Wattage:**

Array: 275.4w, System: 291w; (400-1000w HID Equivalent)

**Driver:**

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

**Controls:**

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with Atlantic Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

**Warranty:**

5-Year Warranty for -40°C to +50°C Environment.

See Page 3 for Projected Lumen Maintenance Table.

**Certification & Listings:**



**Order Information Example:** AIHB45QK1X273U5KGWSP

AIHB45Q	K	1X273		5K	G		
Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
AIHB45Q= 22" LED Aisle Lighter	K=Aisle Optics	1X273=273w	U=120-277V H=347-480V	5K=5000K	G=Clear Flat Glass Lens	W=White C=Custom (Consult Factory)	<b>SF</b> =Single Fuse* <b>DF</b> =Double Fuse* <b>SP</b> =Surge Protection <b>M3</b> = Microwave Sensor for Mounting Heights of 20 Feet or Above* <b>CP6120W</b> =6' White Cord, 3 Wire, L5-15P Twist-Lock Plug <b>CP6277W</b> =6' White Cord, 3 Wire, L7-15P Twist-Lock Plug <b>C6600B</b> =6' Black Cord, STW, 600VAC, 3 Wire, Leads <b>C6600W</b> =6' White Cord, STW, 600VAC, 3 Wire, Leads <b>C4600B</b> =4' Black Cord, SEOW, 600VAC, 3 Wire, Leads <b>BU</b> =Battery Backup* <b>BU</b> =Cold Start Battery Backup, -20°C, 90 Minutes* *120-277V Models Only.


**Lens Options:**



AIHB45Q Shown with Tempered Clear Flat Glass Lens (G)

**Accessories & Replacement Parts:**

Accessories (Order Separately, Field Installed)	
AIHBAR22WG	Wire Guard, Fits AIHB45, for Use with Flat Glass Lenses.
AICPSC	Safety Cable, 3' Steel Cable with Clear Vinyl Coating, Steel Eye & Loop Ends.



AIHBAR22WG



AICPSC


Replacement Parts (Order Separately, Field Installed)	
AIHGL22	22" Tempered Clear Flat Glass Lens
AIHBCB22	22" Clampband
AICPMH3	Die Cast Hook with 1" NPS Threads
AIP17116	Microwave Sensor for Mounting Heights of 20 Feet or Above (120-277V Only).

Replacement BU Available-Consult Factory.



AIP17116

**Photometric Data**

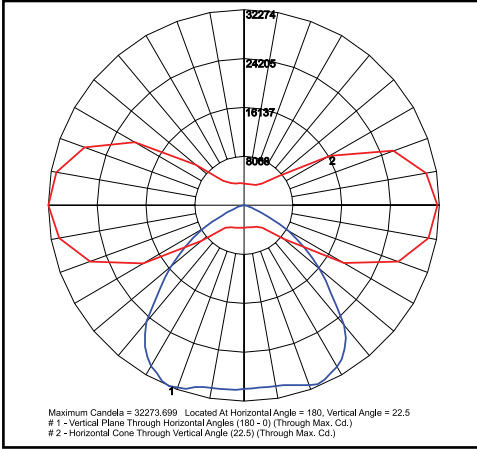

**AIHB45QK1X273U5KG -**  
Clear Glass Lens

**Photometric Performance**

LED Board Watts	Drive Current (mA)	Input Watts	Spacing Criteria	5000 CCT 80 CRI	
				Lumens	LPW
<b>LED 273w with Clear Glass (G)</b>	525	291	1.46	31,135	107

**Projected Lumen Maintenance**

Data shown for 5000 CCT TM-21-11	Input Watts	Compare to MH				Calculated LED Life
		Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	
<b>L70 Lumen Maintenance @ 25°C / 77°F</b>	291	1.00	0.97	0.95	0.90	299,000
<b>L70 Lumen Maintenance @ 50°C / 122°F</b>		1.00	0.97	0.94	0.88	172,000
<b>L80 Lumen Maintenance @ 40°C / 104°F</b>		1.00	0.97	0.93	0.86	148,000

**NOTES:**

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.