

AILVC8

8' Linear LED Vaportight



316 Stainless Steel Mounting Strap:

(Included) Can be mounted direct to ceiling, or to threaded rod pendant. Optional Bail for chain available.

The Atlantic AILVC8 surface mount luminaire is available with clear acrylic, frosted acrylic, or frosted polycarbonate impact resistant lens. Typical lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 12 to 25 feet can be used based on light level and uniformity requirements.

Specifications and Features:

Housing:

White Composted Fiberglass

Listing & Ratings:

ETL Wet Listed Under UL1598 Specifications; RoHS Compliant, IP66, ETL Sanitation Certified to National Sanitation Foundation ANSI NSF2 Food Splash Zone

Lens:

Clear or Frosted Impact Resistant Acrylic Lens, Frosted Polycarbonate

Mounting Options:

Surface Mount or Chain Mount

LED:

3000K, 3500K, or 4000K Array

Wattage:

110w, 130w, 155w & 180w
17,600-28,800 Lumens

Driver:

Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 4kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.



NSF 2 – Food Splash Zone

An ETL Sanitation Mark on Food Service Equipment indicates that equipment is tested to ANSI/NSF 2 is fit for use in the production of food intended for human consumption, or the equipment is fit for use in an environment where food intended for human consumption is produced.

Order Information Example:

AILVC8180U4KACLP

AILVC8		U					
Model	Wattage	Driver	CCT	Lens	Latches	Mounting	Options
AILVC8=8' Linear LED Vaportight	110=110w 130=130w 155=155w 180=180w	U=120-277V	3K=3000K 35K=3500K 4K=4000K	AC=Acrylic Clear Smooth AF=Acrylic Frosted Smooth PF=Polycarbonate Frosted Smooth	LP=White Polycarbonate LS=Stainless Steel* *NSF2 Must Have LS Latch.	(Leave Blank)= Standard Stainless Steel Strap CM=Chain Hang Bail (2 per Housing Chaining. Not Included)	SP=Surge Protector L3=AIHB350W-L3 Wattstopper Occupancy Sensor, 20' Height L7=AIHB350W-L7 Wattstopper Occupancy Sensor, 40' Height S5=Microwave Sensor with Dimming & Remote Programming. 25' Height BU=Battery Backup Constant Wattage, 10w BUC=Battery Backup Constant Wattage, -20C, 10W

Project Information:

Project Name: _____ Fixture Type: _____

Complete Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:



Specifications subject to change without notice. Rev. 012825

Accessories & Replacement Parts:

**Accessories
(Order Separately, Field Installed)**

AIP17126 Remote Programming Tool for AIP17125



AIP17126

**Replacement Parts
(Order Separately, Field Installed)**

AIP17125 Microwave Sensor for Mounting Heights of 26 Feet or Below*

AIHB350W-L3 Wattstopper Passive Infrared Occupancy Sensor, Wet Location, 360° Lens, 40' Diameter Coverage From 20' Height, 120/277V.

AIHB350W-L7 Wattstopper Passive Infrared Occupancy Sensor, Wet Location, 360° Lens, 50' Diameter Coverage From 40' Height, 120/277V.





AIP17125



AIHB350W-L3/L7

— CONTROLLED WITH WattStopper™

Dimensions

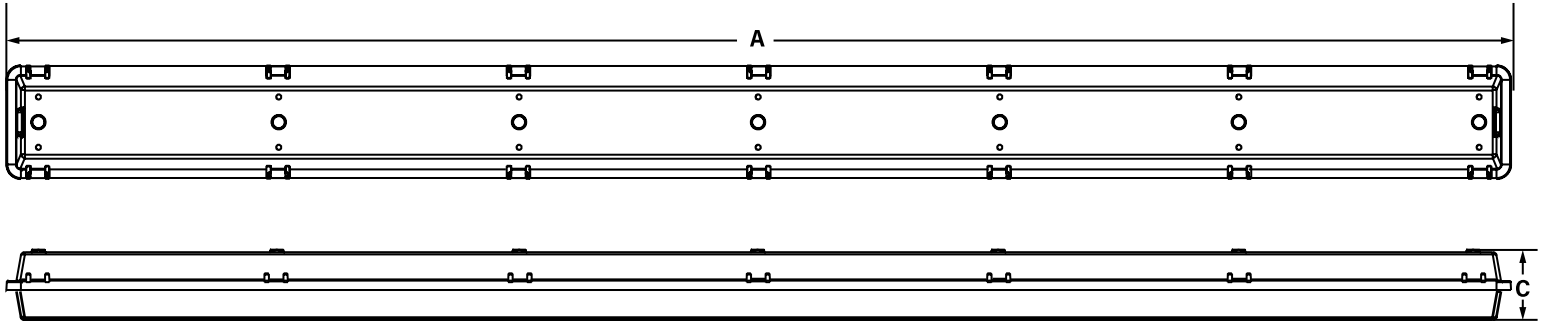

Dimensions

Length (A)	100" (2,540mm)
Width (B)	6.77" (172mm)
Height (C)	4.27" (108mm)