

AISTP10Q

LED Step Light




Black



Bronze



White



Dimensions

Width (A)	5" (127mm)
Height (B)	3" (78mm)
Depth (C)	1 1/4" (45mm)

The Atlantic LED AISTP10Q Step Light provides fully shielded lighting for outdoor path, walkways and landscape areas. Optics are designed to replace outdated Halogen and Compact Fluorescent lighting systems. These fixtures are ideal for retail centers, restaurants, hotels, schools and universities, public transit and airports, office buildings and medical facilities.

Specifications and Features:

Housing:

Die-Cast Aluminum Housing and Heatsink.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP66 Sealed LED Compartment.

Finish:

Textured Black, Bronze, or White Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Frosted Tempered Glass Array Lens

Mounting Options:

Mounts to Standard Single Gang Junctions Box with (2) 1 1/2" – 6-32 Philips Bevel Head Stainless Steel Screws.

LED:

Aluminum Boards

Wattage:

Array: 4w, System: 3.2w

Driver:

On-Board Electronic Driver, 120V, 50/60Hz; Less Than 20% THD and PF>0.90.

Warranty:

2-Year Warranty for -20°C to +40°C Environment.

Project Information:

Project Name: _____ Fixture Type: _____

Complete Catalog #: _____ Date: _____

Comments: _____


Certification & Listings:




Order Information Example: AISTP10QF1X41204KB

AISTP10Q	F	1X4	120	4K	
Model	Optic	Wattage	Driver	CCT	Color
AISTP10Q=LED Step Light	F=Type V	1X4=4w	120=120V	4K=4000K	Z=Bronze B=Black W=White C=Custom (Consult Factory)

Photometric Data

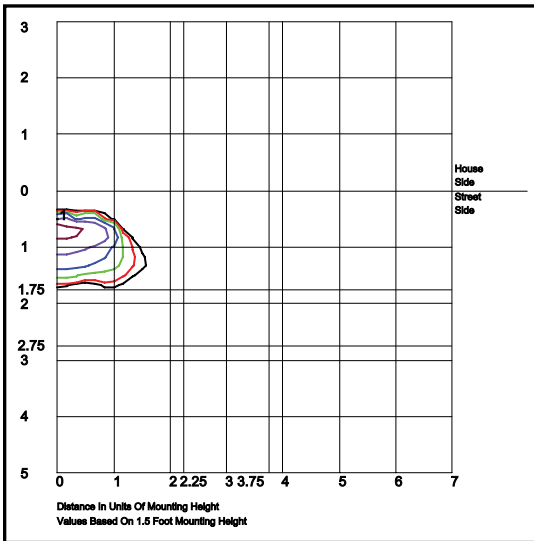

AISTP10QF1X41204K
Type V
Mounted 18" Above Floor

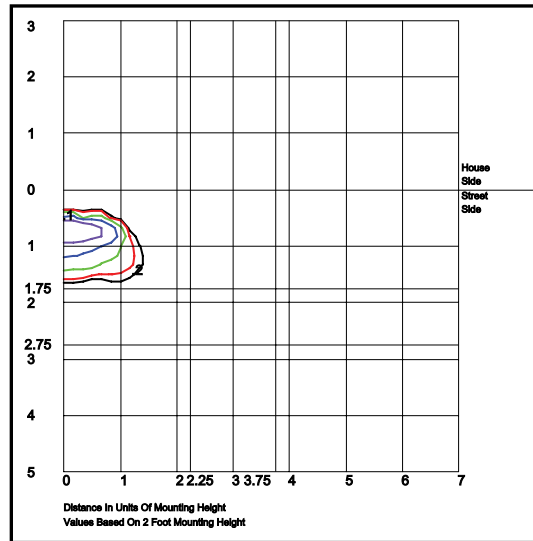

AISTP10QF1X41204K
Type V
Mounted 24" Above Floor

Photometric Performance

LED Board Watts	Input Watts	Optic	4000 CCT 80 CRI			
			Lumens	B	U	G
LED 4w	3.2	Type V	12	0	0	0