

AITV2C3

Small 2Gen LED Slimline Flood and Wall Pack

L70
25°C **76,000 Hours**



12V
AVAILABLE




Shown with Battery Backup Option. Only Available for Wall Mount

Shown with "KN" Knuckle Installed.

Dimensions

Width (D)	6" (152mm)
Height (A)	7 7/8" (200mm)
Length (B)	5 1/4" (130mm)
Length (B) with Knuckle	9 1/4" (235mm)



The Atlantic AITV2C3 2Gen Slimline luminaire is available in two wattages designed to replace HID lighting systems up to 175w MH or HPS. Typical applications include general area, parking, flood, security, and accent lighting for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 8 to 15 feet can be used based on light level and uniformity requirements.

Specifications and Features:

Housing:

Die-Cast Gasketed Aluminum Housing, Includes Cast-In Box Template and Built in Level. White Reflector. Nickel-Plated Stainless Steel Hardware.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP66 Sealed LED Compartment.

Finish:

Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Tempered Clear Flat Glass Lens.

Mounting Options:

Mount Directly Over Recessed Electrical Box or use 1/2" Surface Mount Conduit. Adjustable Knuckle with 1/2" NPS Threads, Sold Separately, Field Installed.

COB LED:

Cool Copper COB

Wattage:

20w COB: 20w, System: 21w; (100w HID Equivalent) **Note: 12V Model is 20w only.**
40w COB 40w, System: 43w; (175w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection is 2kV for 20w, 6kV for 40w. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.
12V: Electronic Driver, 12-17VAC Input, 50/60Hz, Non-Dimmable (20w Model Only)

Controls:

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with Atlantic Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Battery Backup:

Battery Backup Option Includes Accessory Housing (Ships Separately). Empty Accessory Housing is Available For Use When a Uniform Building Aesthetic is Desired.

Warranty:

5-Year Warranty for -40°C to +50°C Environment.

See Page 4 for Projected Lumen Maintenance Table.








Project Information:

Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

Certification & Listings:




Order Information Example:			AITV2C32X20U41KZKNP			
AITV2C3			41K			
Model	Wattage	Driver	CCT	Color	Mounting	Options
AITV2C3=Small 2Gen LED Slimline Flood and Wall Pack	2X10=20w 2X20=40w	U=120-277V V=12V* *20w Model Only.	41K=4100K	Z=Bronze C=Custom (Consult Factory)	KN=Knuckle* *Optional, field installed. Order only for flood model.	SF=Single Fuse* DF=Double Fuse* SP=Surge Protection* P14=Pencil Photocell, 120-277VAC* BU4=Battery Backup, 90 Minutes \blacktriangleleft BUC4=Cold Start Battery Backup, -20°C, 90 Minutes \blacktriangleleft *Not Available on 12V Model. \blacktriangleleft 120-277V Models Only. \blacksquare Wall Mount Only. (Not available for "KN")

Accessories & Replacement Parts:		
Mounting Accessories (Order Separately, Field Installed)	Accessories (Order Separately, Field Installed)	Replacement Parts (Order Separately, Field Installed)
AIFLPTFZ Die-cast Post Top Fitter for 2 3/4" to 3 1/2" Poles, Bronze Powdercoat Finish, Three (3) 1/2" Coin Plugs.	AIP18110 110-130V, 120VAC Pencil Photocell	AIFLSTZ Die-Cast Adjustable Knuckle with 1/2" NPS Threads, Bronze Powdercoat Finish.
AIFLSTK Heavy Duty Ground Stake, Built-in Wiring Compartment with 1/2" NPS Threaded Fitting, Black Plastic. For Line-Voltage Applications.	AIP18112 208-277V, 240VAC Pencil Photocell	AIP18114 120-277V, 50/60Hz Pencil Photocell
AINA04 Plastic Ground Stake with 1/2" NPT Threads, 11" H x 3" Diameter. For Low-Voltage Applications.	AIACCHSG4* Empty Die Cast Accessory Housing, Powdercoat Finish	For Replacement Battery Backup, see the Atlantic LED Battery Backup Specification Sheet.
	Not Available on 12V Model.	Not Available on 12V Model.
	*Specify Color: Z=Bronze, B=Black, C=Custom (Consult Factory)	
   <p>AIFLPTFZ AIFLSTK AINA04</p>	  <p>AIP18110 & AIP18112 AIACCHSG4</p>	  <p>AIFLSTZ* AIP18114 *Shown Mounted</p>

EPA (Effective Projected Area)		
Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
	.31	5 Lbs


Photometric Data

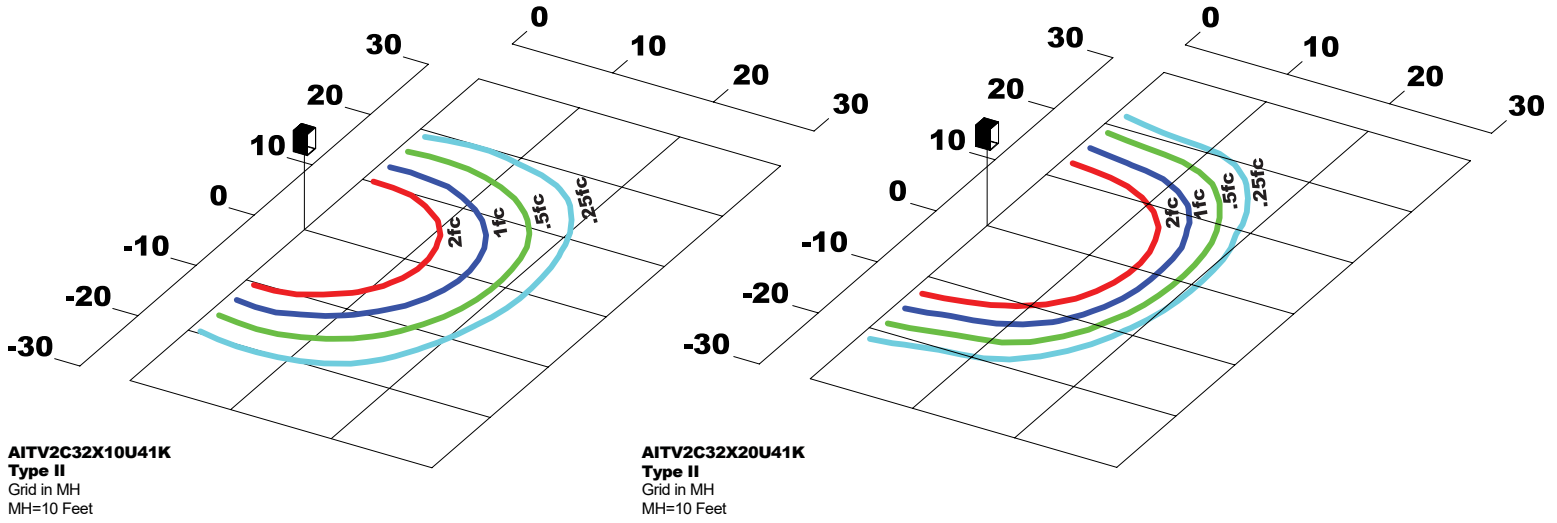


Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	4100 CCT 80 CRI				
				Lumens	LPW	B	U	G
COB LED 21w	525	21	Type II	2,300	110	1	1	0
COB LED 43w		43	Type II	4,025	94	2	1	1

Photometric Data

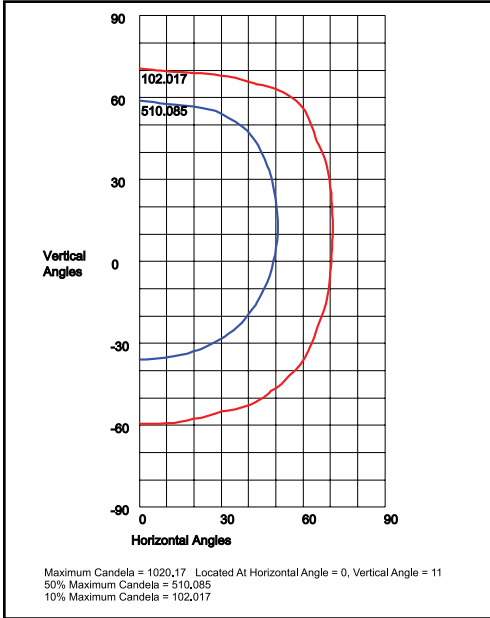

AITV2C32X10U41K
110°H x 100°V Beam, NEMA 7H x 6V

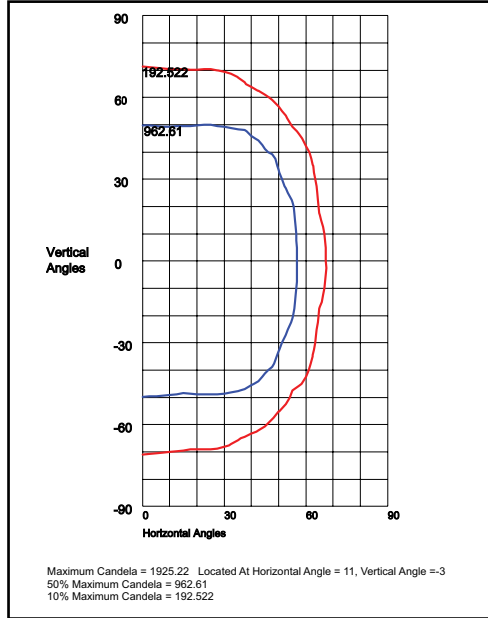

AITV2C32X20U41K
100°H x 90°V Beam, NEMA 7H x 6V

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Beam	4100 CCT 80 CRI	
				Lumens	LPW
COB LED 21w	525	21	110°H x 100°V, NEMA 7H x 6V	2,304	110
COB LED 43w		43	100°H x 90°V, NEMA 7H x 6V	4,034	94

Projected Lumen Maintenance

Data shown for 4100 CCT TM-21-11	Input Watts	Compare to MH				Calculated LED Life
		Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	
L70 Lumen Maintenance @ 25°C / 77°F	All wattages up to and including 43w	1.00	0.90	0.80	0.61	76,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.86	0.72	0.44	54,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.88	0.76	0.52	42,000

NOTES:
1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.