


AIWL40Q

LED 12" Temporary Worklight

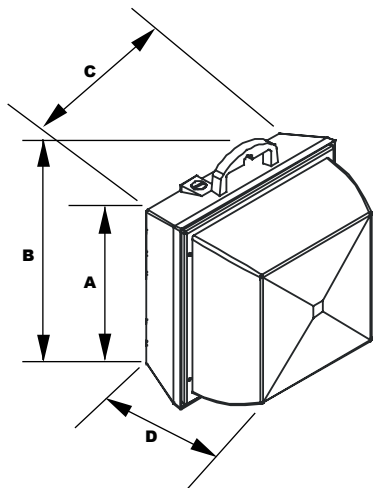

Dimensions

Length (D)	9" (229mm)
Width (C)	12 1/2" (314mm)
Height 1 (A)	12 1/2" (314mm)
Height 2 (B)	14 3/4" (365mm)

Specifications and Features:

Housing:

Die Cast Housing with Chromate Conversion Coating, Includes Handle, Magnet on Back, Feet for Bottom, Cord Set with Molded Three-Prong Plug, and Liquid-Tight Connector.

Listing & Ratings:

CSA: Listed for Dry Locations, ANSI/UL 1598, 8750; IP54 Sealed LED Compartment.

Finish:

Yellow Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Standard Clear UV-Stabilized Polycarbonate Prismatic Lens

Mounting Options:

Attached Handle Allows Hanging on Hook, Magnet Allows Attaching to Steel Surfaces, or Stands with Attached Feet on Floor.

LED:

Aluminum Boards

Wattage:

Array: 45.4w, System: 52.6w; (175w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps. Cord Set for 120V Use Only.

Warranty:

5-Year Warranty for -40°C to +40°C Environment.

Order Information Example:

AIWL40QF1X45U5KSZSF

AIWL40Q	F	1X45	U	5K	S		
Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
AIWL40Q= LED 12" Temporary Worklight	F=Type IV	1X45=45w	U=120-277V* Wired For 120V	5K=5000K	S=Standard Clear UV-Stabilized Polycarbonate Prismatic Lens	Y=Yellow C=Custom (Consult Factory)	SF=Single Fuse (120-277V Only) DF=Double Fuse (120-277V Only) SP=Surge Protection

Project Information:

Project Name: _____ Fixture Type: _____

Complete Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:



Photometric Performance

				5000 CCT 85 CRI	
LED Board Watts	Drive Current (mA)	Input Watts	Optics	Lumens	LPW
LED 45w	525	53	Type IV	5,138	97