


EELP | LED Long Life Hours

Thermoplastic Low Profile LED Emergency Light



Dimensions

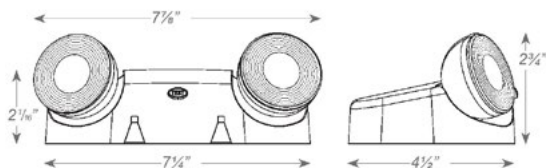

Order Information Example:

EELP

EELP		
Model	Housing Color	Options
EELP=Thermoplastic Low Profile LED Emergency Light	(blank) = White B = Black	RC = Remote Capacity¹ SPV = 120/230 Volt 50/60Hz HL = High Lumen LED¹

NOTES: 1. HL and RC options cannot be combined. HL option is standard with 0.5W of remote capacity.

Remote Lamp Compatibility:

Model Number	Battery	Remote Capacity	Compatible Remote Head Family	
			EZRH-MV	EERH
EELP-RC	3.6V	1.0W	X	X
EELP-HL	3.6V	0.5W		X

Project Information:

Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

Emergency & Exit Lighting

The Atlantic Thermoplastic Low Profile LED Emergency Light design provides energy efficient, code-compliant path of egress with fully adjustable LED lamp heads for use in applications such as corridors, aisles and stairwells.

Specifications and Features:

Housing:

Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

Listing & Ratings:

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes. UL Listed for damp locations (0°C- 40°C). Certified to CEC under Title 20 Regulations.

Mounting:

Surface mount back plate with universal knockout pattern accommodates four industry standard junction boxes. Suitable for wall or ceiling mount.

Illumination:

Adjustable long lasting, efficient ultra-bright white LED lamp heads. Unique all-inclusive 0.5W lamp, reflector and lens assembly per lamp head.

Electrical:

Dual 120/277 voltage standard with optional dual 120/230 voltage available. Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery). Includes 3.6 volt, long life, maintenance-free, rechargeable Ni-Cd battery. Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination. Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours. Remote capacity available as an option.

Warranty:

One year warranty on all electronics and housing. Battery pro-rated for one year.

Electrical Information:

Model Number	Input Watts (W)			Input Amps (A)		
	120V	230V	277V	120V	230V	277V
EELP	0.33	0.33	0.37	0.046	0.044	0.052
EELP-RC/HL	0.52	0.52	0.60	0.068	0.068	0.070

Certification & Listings:

