


## Combo LED Exit- AI EECXERB1

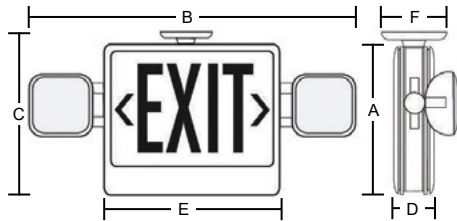

A height	B length	C height	D thickness	E width	F width
10"	22"	11"	2¾"	13"	5"
254mm	559mm	279mm	70mm	330mm	127mm


### Description

The Atlantic Industrial LED Exit/Emergency Light is suitable for applications requiring both exit sign and lighting equipment. Typical wall or ceiling mounted applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

### Specifications and Features

- Fully automatic operation
- LEDs have 25+ year life
- Double faced
- Snap-out arrows
- Twin adjustable light heads
- Automatic low voltage disconnect
- Thermoplastic injection molded housing
- Push to test switch
- Battery backup
- Universal mounting canopy for top installation
- 120-277V
- UL Listed

## Combo LED Exit/Emergency Light - Remote Capable - AI EECXERB2RCLED

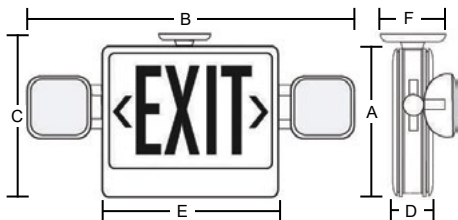

A height	B length	C height	D thickness	E width	F width
10"	22"	11"	2¾"	13"	5"
254mm	559mm	279mm	70mm	330mm	127mm

### Description

The Atlantic Industrial LED Exit/Emergency Light is suitable for applications requiring both exit sign and lighting equipment. Typical wall or ceiling mounted applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

### Specifications and Features

- **Illumination:** Long-life, efficient ultra-bright white LED lamp heads. High-performance, chrome-plated metallized reflector and plastic lens for optimal light distribution. Adjustable LED lamp heads provides optimal center-to-center spacing.
- **Electrical:** Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. Long-life, maintenance-free, rechargeable NiCd battery. Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- **Mounting Options** EZ-Snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.
- **Housing:** Injection-molded, engineering-grade, 5VA flame retardant, high-impact Resistant, thermoplastic in white finish. EZ Snap-Out chevron directional indicators. Single or double face.
- **Remote Capable:** Accepts up to two additional LED remote heads, 3 watt maximum.
- **Warranty/Listing:** Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, local and state codes. UL listed for damp locations.