

## PARKING GARAGE SOLUTIONS



Uniform low glare controlled lighting for floors, ceiling and walls for increased visibility and security.

**LED**icated




## AIVGS40QF1X60

- Center of Standard 30ft X 60ft Parking Bay
- 3.0 FTC AVG, 7.3 FTC MAX, 1.5 FTC MIN, 2.3:1 AVG/MIN, 4.9:1 MAX/MIN

<b>MODEL</b>	AIVGS40QF LED Garage Square with Type VS Optic
<b>WATTAGES</b>	<ul style="list-style-type: none"> <li>•1x40w</li> <li>•1x60w</li> <li>•1x84w</li> </ul>
<b>DRIVER</b>	<ul style="list-style-type: none"> <li>•120-277v (U)</li> <li>•347-480v (H)</li> </ul>
<b>CCT</b>	•4000K (4K)
<b>COLOR</b>	<ul style="list-style-type: none"> <li>•Bronze (Z)</li> <li>•Custom Color (Consult Factory)</li> </ul>
<b>MOUNTING</b>	<ul style="list-style-type: none"> <li>•Easy-Hang Bracket</li> <li>•Trunnion</li> <li>•Pendant Mount</li> </ul>
<b>OPTIONS</b>	See Specification Page for Options.

### MOUNTING OPTIONS

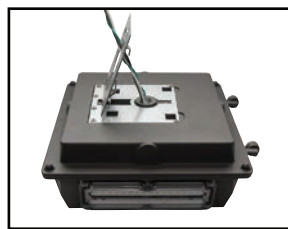

Easy Hang Mount



Trunnion



Pendant

### Fixture:

Die Cast Aluminum Housing, Powdercoat Finish, UV-Stabilized Polycarbonate Lens.

### Wattage:

40w Array: 37w, System: 40w; (Up to 100w HID Equivalent)  
60w Array: 53w, System: 60w; (Up to 175w HID Equivalent)  
84w Array: 74w, System: 84w; (Up to 175w HID Equivalent)

### Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750. IP66 Sealed LED Compartment.

### Controls & Options:

Motion Sensors, Surge Protection, Fuses, Battery Backup

L70  
25°C → 138,000 Hours



**ATLANTIC Solutions**  
A QSSI Company Since 1985

## PARKING GARAGE SOLUTIONS


Highly Uniform Performance Optics

### TYPICAL GARAGE LAYOUT


30ft X 60ft Bay; 9ft Mounting Height



**PLAN VIEW**

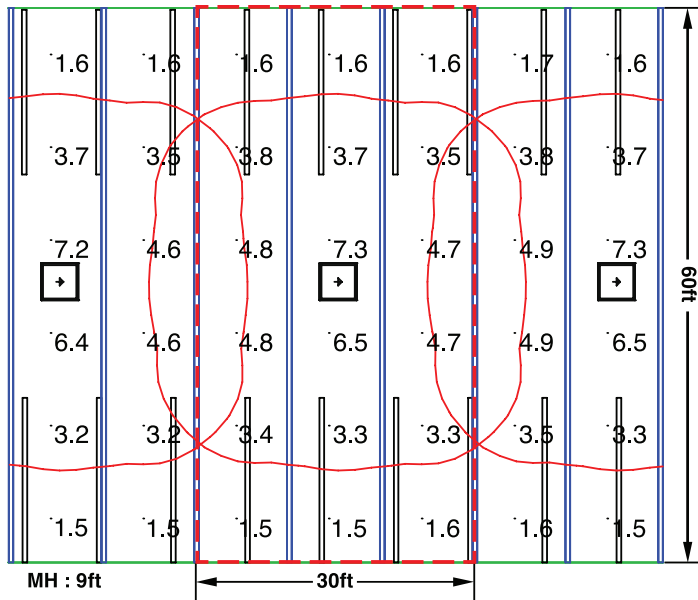


**POLAR GRAPH**

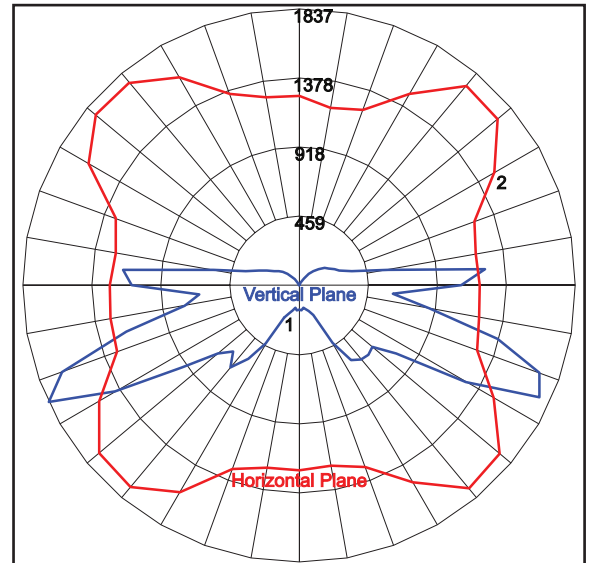

- Horizontal Max Candela above normal viewing angle when driving.
- Square Type 5 pattern creates better uniformity.

**RENDERED VIEW**

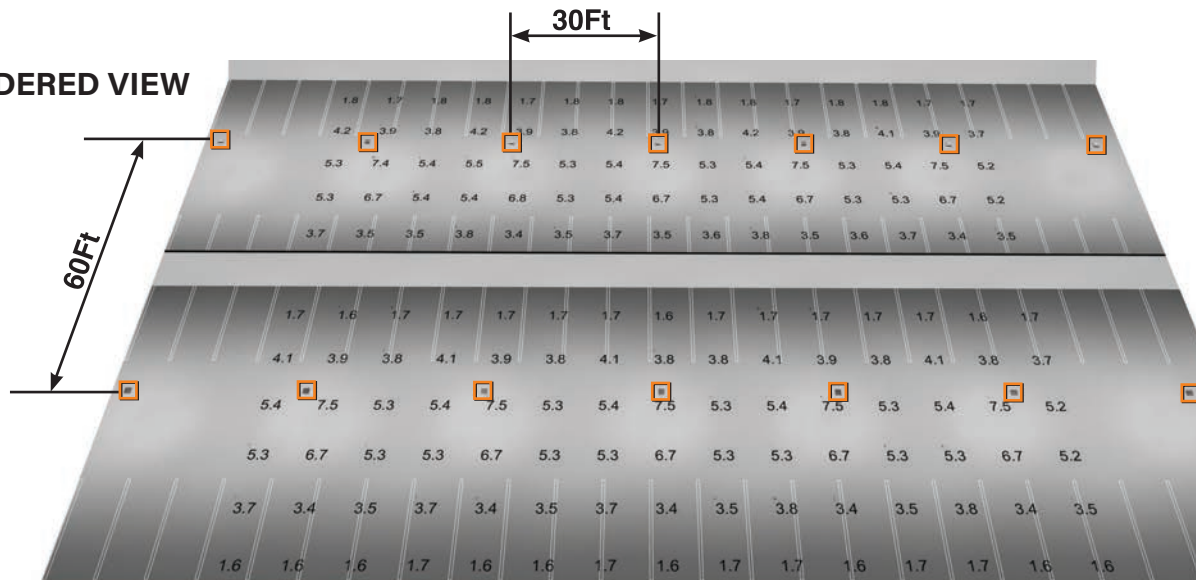

AIVGS40QF1X60 3.0 FTC AVG, 7.3 FTC MAX, 1.5 FTC MIN, 2.3:1 AVG/MIN, 4.9:1 MAX/MIN  
Exceeds IES RP-20-98 of 1.0 FTC MIN and MAX/MIN of 10:1