

Right Angle Clamps

Industry Standards

- UL 2239

Construction


- Malleable Iron
- Steel U-Bolt and Nuts

Application

- Designed to secure Rigid, IMC or EMT perpendicular to beam, channel and angle supports

Features

- Provides a secure, tight clamping and is capable of handling additional weight and load
- RoHS compliant

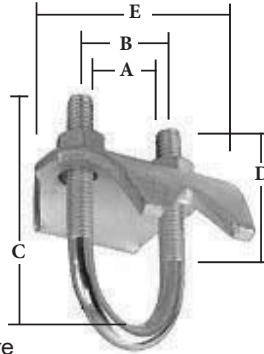

catalog number	size in inches	box qty.	weight lbs. per unit	weight lbs. per box	dimensions (in.)				
					A	B	C	D	E
AI MRC- 50	1/2"	50	0.349	17.5	1.000	1.250	2.500	1.812	2.603
AI MRC- 75	3/4"	50	0.386	19.3	1.125	1.375	2.812	1.812	2.250
AI MRC-100	1"	50	0.438	21.9	1.375	1.625	3.062	1.812	2.563
AI MRC-125	1 1/4"	25	0.485	12.1	1.750	2.000	3.189	1.812	2.875
AI MRC-150	1 1/2"	25	0.548	13.7	2.000	2.375	3.500	1.812	3.250
AI MRC-200	2"	25	0.926	23.2	2.500	2.500	4.500	2.625	4.063
AI MRC-250	2 1/2"	20	1.065	21.3	3.000	3.250	4.875	2.625	4.500
AI MRC-300	3"	10	1.264	12.6	3.625	3.875	5.375	2.625	5.125
AI MRC-350	3 1/2"	10	1.36	13.6	4.063	4.563	5.875	2.625	5.625
AI MRC-400	4"	10	1.634	16.3	4.688	5.063	6.688	2.625	6.125

Parallel Conduit Clamps

Industry Standards

- UL 2239

Construction


- Malleable Iron
- Steel bolt and Nuts

Application

- Designed to secure Rigid, IMC or EMT perpendicular to beam, channel and angle supports

Features

- Provides a secure, tight clamping and is capable of handling additional weight and load
- RoHS compliant



catalog number	size in inches	box qty.	weight lbs. per unit	weight lbs. per box	dimensions (in.)	
					A	B
AI MPC- 50	1/2"	50	0.538	26.9	2.875	1.437
AI MPC- 75	3/4"	50	0.597	29.9	3.063	1.687
AI MPC-100	1"	50	0.624	31.2	3.25	2.00
AI MPC-125	1 1/4"	30	0.805	24.2	3.625	2.125
AI MPC-150	1 1/2"	30	0.865	26.0	3.875	2.186
AI MPC-200	2"	20	1.000	20.0	4.625	2.876